KV-1412ET/KV-1412EC

RM-634 RM-635

AEP Model

Chassis No. SCC-524D-A



December, 1983

XE-3 CHASSIS

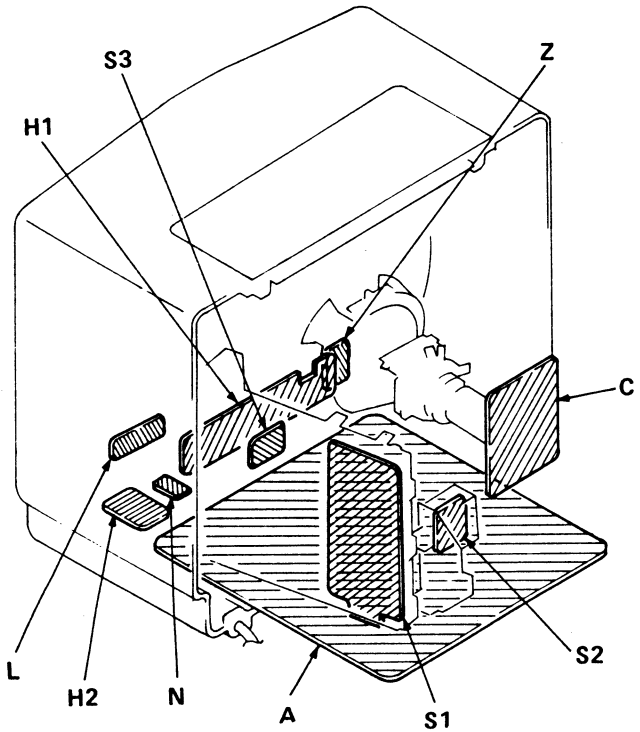

SPECIFICATIONS

KV-1412EC

Television system	CCIR TV standards (system B, G and H)
Color system	PAL
Channel coverage	VHF channels E2 - U20 (45 - 300 MHz) UHF channels E21 - E68
Programing system	30 programs Automatic programing digital tuning
Picture tube	36.8 cm, 90-degree deflection Trinitron system (33.7 cm screen measured diagonally)
Antenna	VHF/UHF telescopic antenna 75-ohm external antenna socket for VHF/UHF (DIN 45325/IEC 169-2)
RF AUX socket	Auxiliary RF input for one channel VHF channels E2 - U20 (45 - 300 MHz) UHF channels E21 - E68 75-ohm (coaxial type)
Speaker	9 × 5 cm
Audio output	1.3 W
Power requirements	220 V ac, 50 Hz
Power consumption	70 W (IEC) 11.5 W (in stand-by condition)
Dimensions	Approx. 364 × 354 × 427 mm (w/h/d)
Weight	Approx. 12.5 kg
Accessories supplied	Earphone ME-20B Remote Commander RM-635

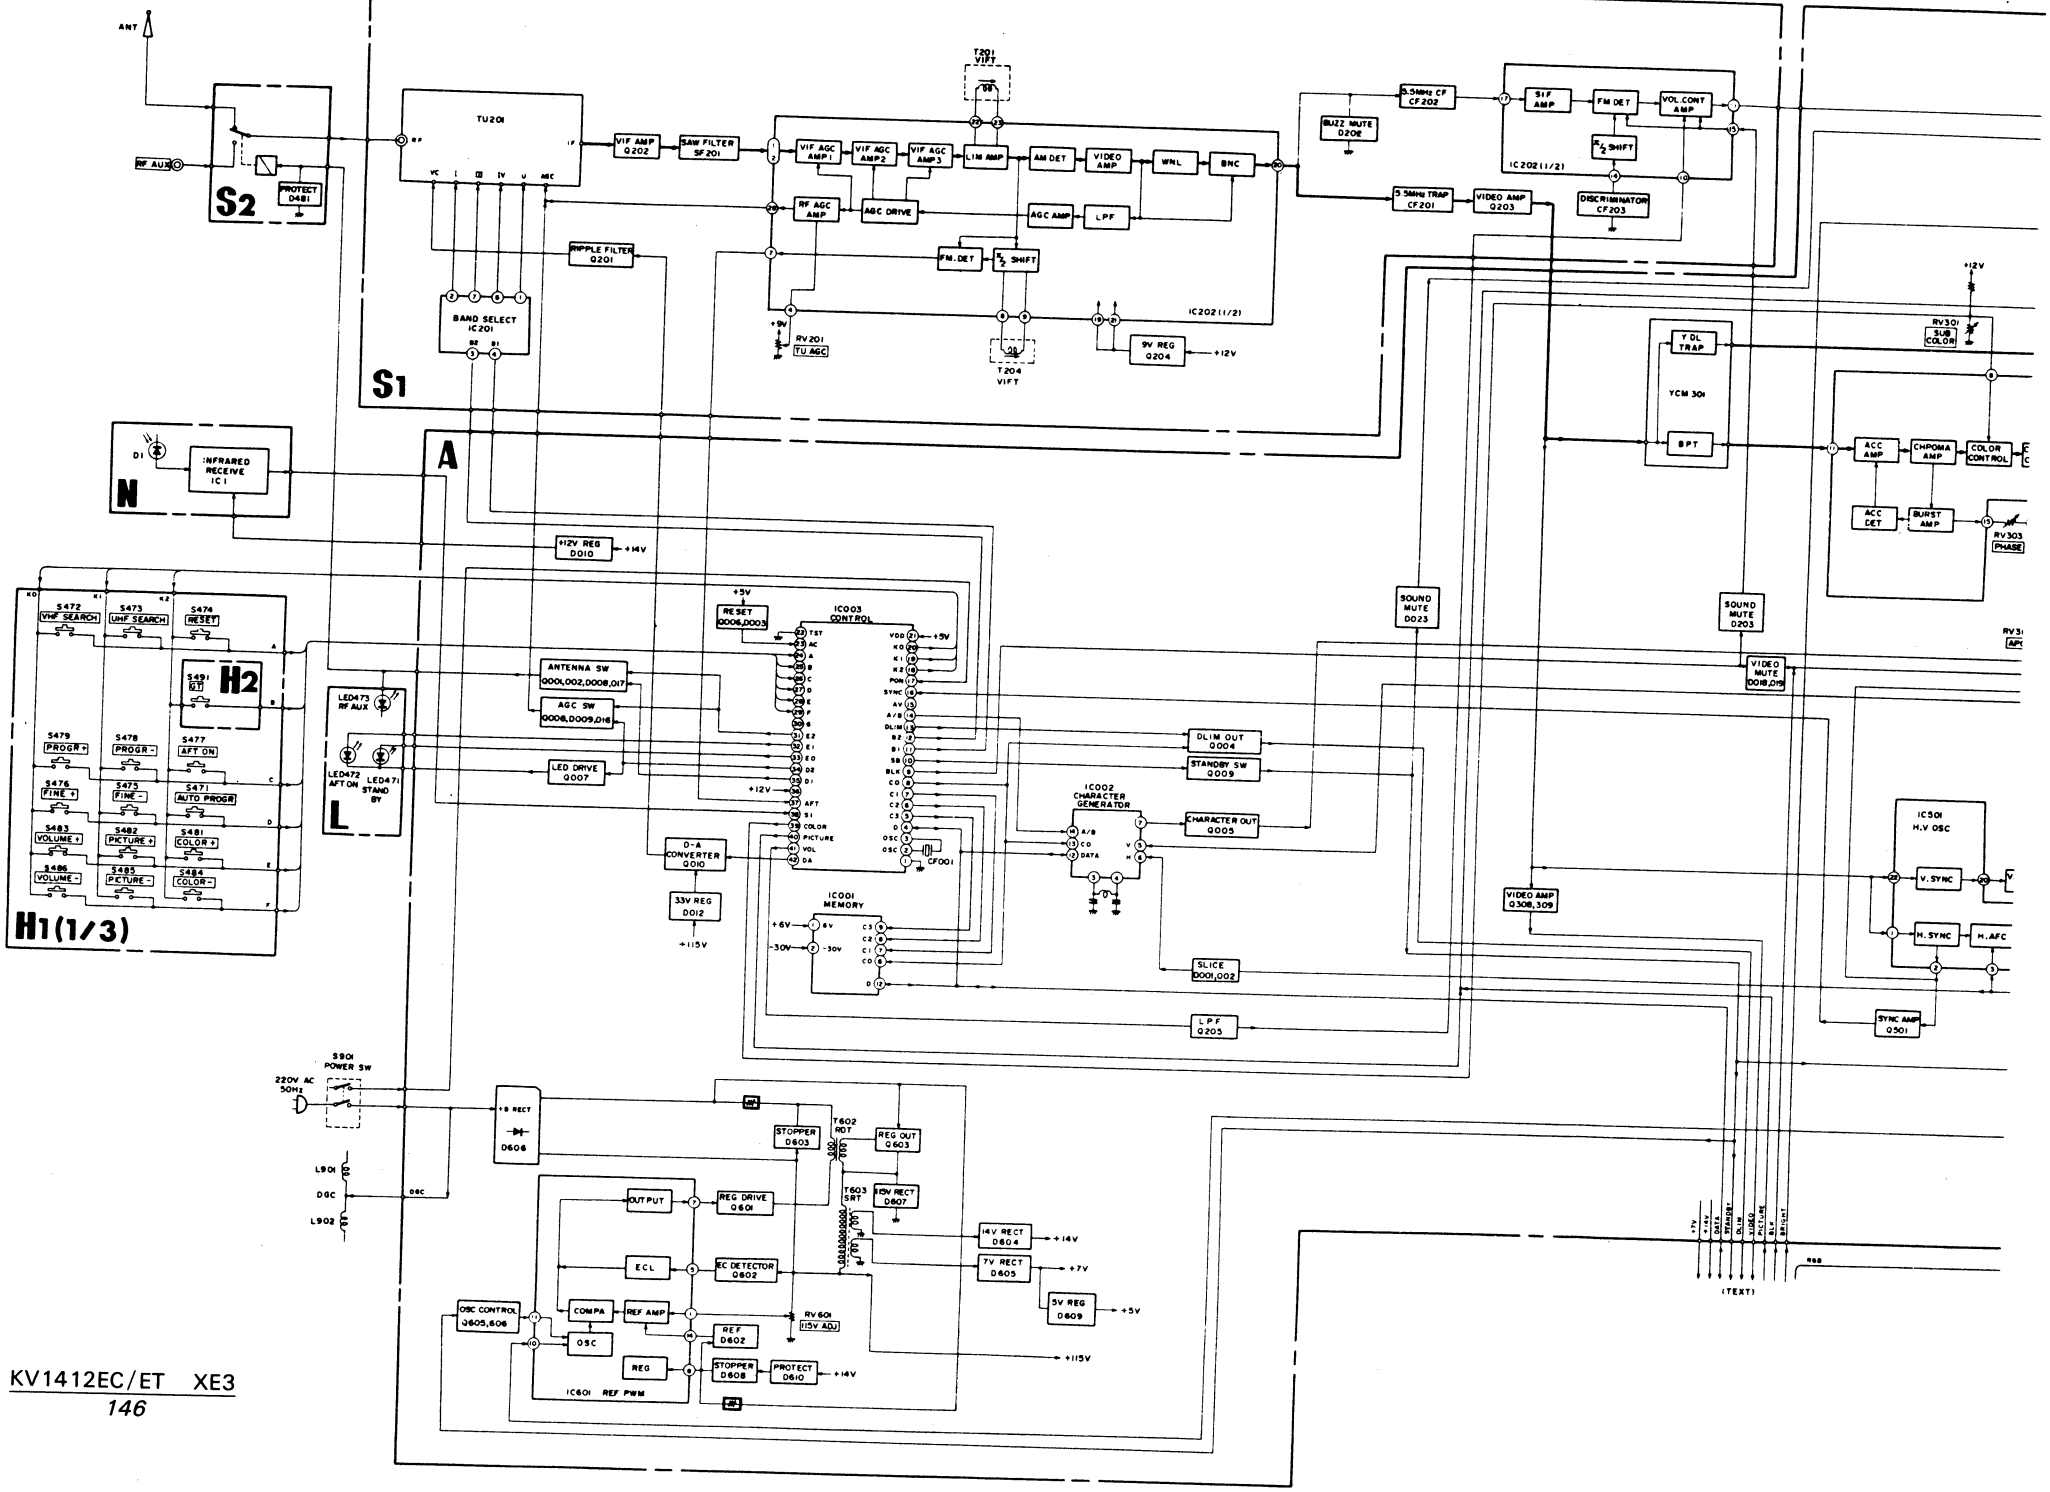
ANT
RF AUX
S2
PROTECT D481
TU201
VIF AMP Q202
SAW FILTER SF201
VIF AGC AMP1
VIF AGC AMP2
VIF AGC AMP3
LIM AMP
AM DET
VIDEO AMP
WNL
BNC
RF AGC AMP
AGC DRIVE
AGC AMP
LPF
FM DET
1/2 SHIFT
IC202(1/2)
RIPPLE FILTER Q201
BAND SELECT IC201
T201 VIFT
T204 VIFT
RV201 TU AGC
9V REG Q204
+12V
BUZZ MUTE D208
5.5MHz CF CF202
5.5MHz TRAP CF201
VIDEO AMP Q203
SIF AMP
FM DET
VOL CONT AMP
DISCRIMINATOR CF203
S1
A
N
L
INFRARED RECEIVE IC1
+12V REG D010
+14V
+5V
RESET Q006,D003
IC003 CONTROL
ANTENNA SW Q001,002,D008,017
AGC SW Q006,D009,D016
LED DRIVE Q007
LED473 RF AUX
LED472 AFT ON
LED471 STAND BY
D-A CONVERTER Q010
33V REG D012
+115V
+12V
IC002 CHARACTER GENERATOR
IC001 MEMORY
DLIM OUT Q004
STANDBY SW Q009
CHARACTER OUT Q005
SLICE D001,002
LPF Q205
SOUND MUTE D023
SOUND MUTE Q203
VIDEO MUTE D018,019
VIDEO AMP Q308,309
Y DL TRAP
YCM 30t
BPT
RV301 SUB COLOR
ACC AMP
CHROMA AMP
COLOR CONTROL
ACC DET
BURST AMP
RV303 PHASE
IC501 H.V OSC
V.SYNC
H.SYNC
H.AFC
SYNC AMP Q501
(TEXT)
S472 VHF SEARCH
S473 UHF SEARCH
S474 RESET
S491 ST
H2
S479 PROGR+
S478 PROGR-
S477 AFT ON
S476 FINE+
S475 FINE-
S471 AUTO PROGR
S483 VOLUME+
S482 PICTURE+
S481 COLOR+
S486 VOLUME-
S485 PICTURE-
S484 COLOR-
H1(1/3)
S901 POWER SW
220V AC 50Hz
+B RECT D606
L901
L902
D606
STOPPER D603
REG OUT Q603
T602 RDT
T603 SRT
15V RECT D607
OUTPUT
REG DRIVE Q601
ECL
EC DETECTOR Q602
COMPA
REF AMP
OSC
REG
REF D602
STOPPER D608
PROTECT D610
OSC CONTROL Q605,606
RV601 115V ADJ
14V RECT D604
7V RECT D605
5V REG D609
+14V
+7V
+5V
+115V
IC601 REF PWM

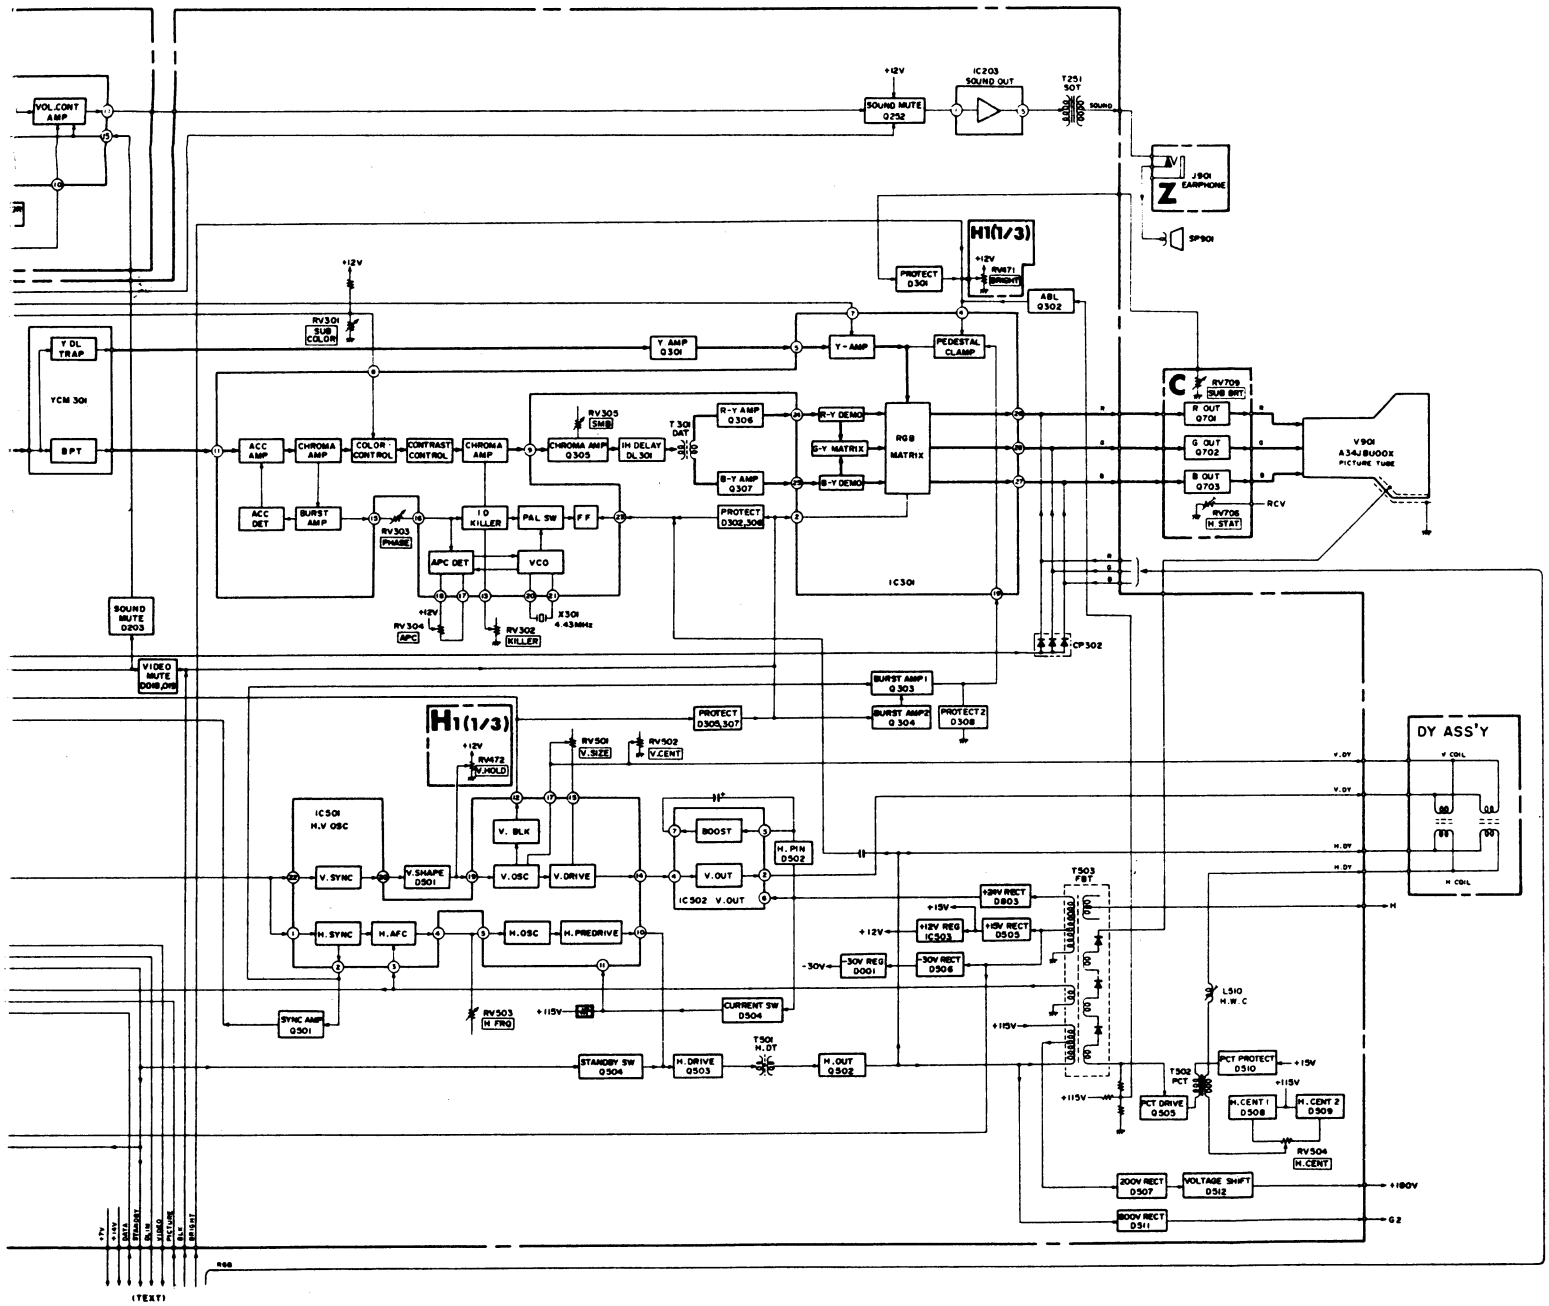
VOL.CONT AMP
+12V
IC203 SOUND OUT
T251 SOT
SOUND MUTE Q252
SOUND
J901 EARPHONE
SP901
H1(1/3)
PROTECT D301
RV471 BRIGHT
ABL Q302
RV301 SUB COLOR
Y DL TRAP
YCM 301
BPT
Y AMP Q301
Y-AMP
PEDESTAL CLAMP
C
RV709 SUB BRT
R OUT Q701
G OUT Q702
B OUT Q703
RV706 H.STAT
RCV
V901 A34JBU00X PICTURE TUBE
ACC AMP
CHROMA AMP
COLOR CONTROL
CONTRAST CONTROL
CHROMA AMP
RV305 SMB
CHROMA AMP Q305
1H DELAY DL301
T301 DAT
R-Y AMP Q306
B-Y AMP Q307
R-Y DEMO
G-Y MATRIX
B-Y DEMO
RGB MATRIX
ACC DET
BURST AMP
RV303 PHASE
1D KILLER
PAL SW
FF
PROTECT D302,308
IC301
APC DET
VCO
X301 4.43MHz
RV304 APC
RV302 KILLER
SOUND MUTE D203
VIDEO MUTE D048,049
CP302
BURST AMP1 Q303
BURST AMP2 Q304
PROTECT2 D308
H1(1/3)
RV472 V.HOLD
PROTECT D305,307
RV501 V.SIZE
RV502 V.CENT
DY ASS'Y
V COIL
H COIL
IC501 H.V OSC
V. BLK
BOOST
V.SYNC
V.SHAPE D501
V.OSC
V.DRIVE
V.OUT
H.PIN D502
IC502 V.OUT
T503 FBT
+28V RECT D803
+15V REG IC503
+15V RECT D505
-30V REG D001
-30V RECT D506
H.SYNC
H.AFC
H.OSC
H.PREDRIVE
SYNC AMP Q501
RV503 H.FRQ
CURRENT SW D504
L510 H.W.C
PCT PROTECT D510
T502 H.DY
STANDBY SW Q504
H.DRIVE Q503
H.OUT Q502
T502 PCT
PCT DRIVE Q505
H.CENT1 D508
H.CENT2 D509
RV504 H.CENT
200V RECT D507
VOLTAGE SHIFT D512
+180V
900V RECT D511
G2
(TEXT)

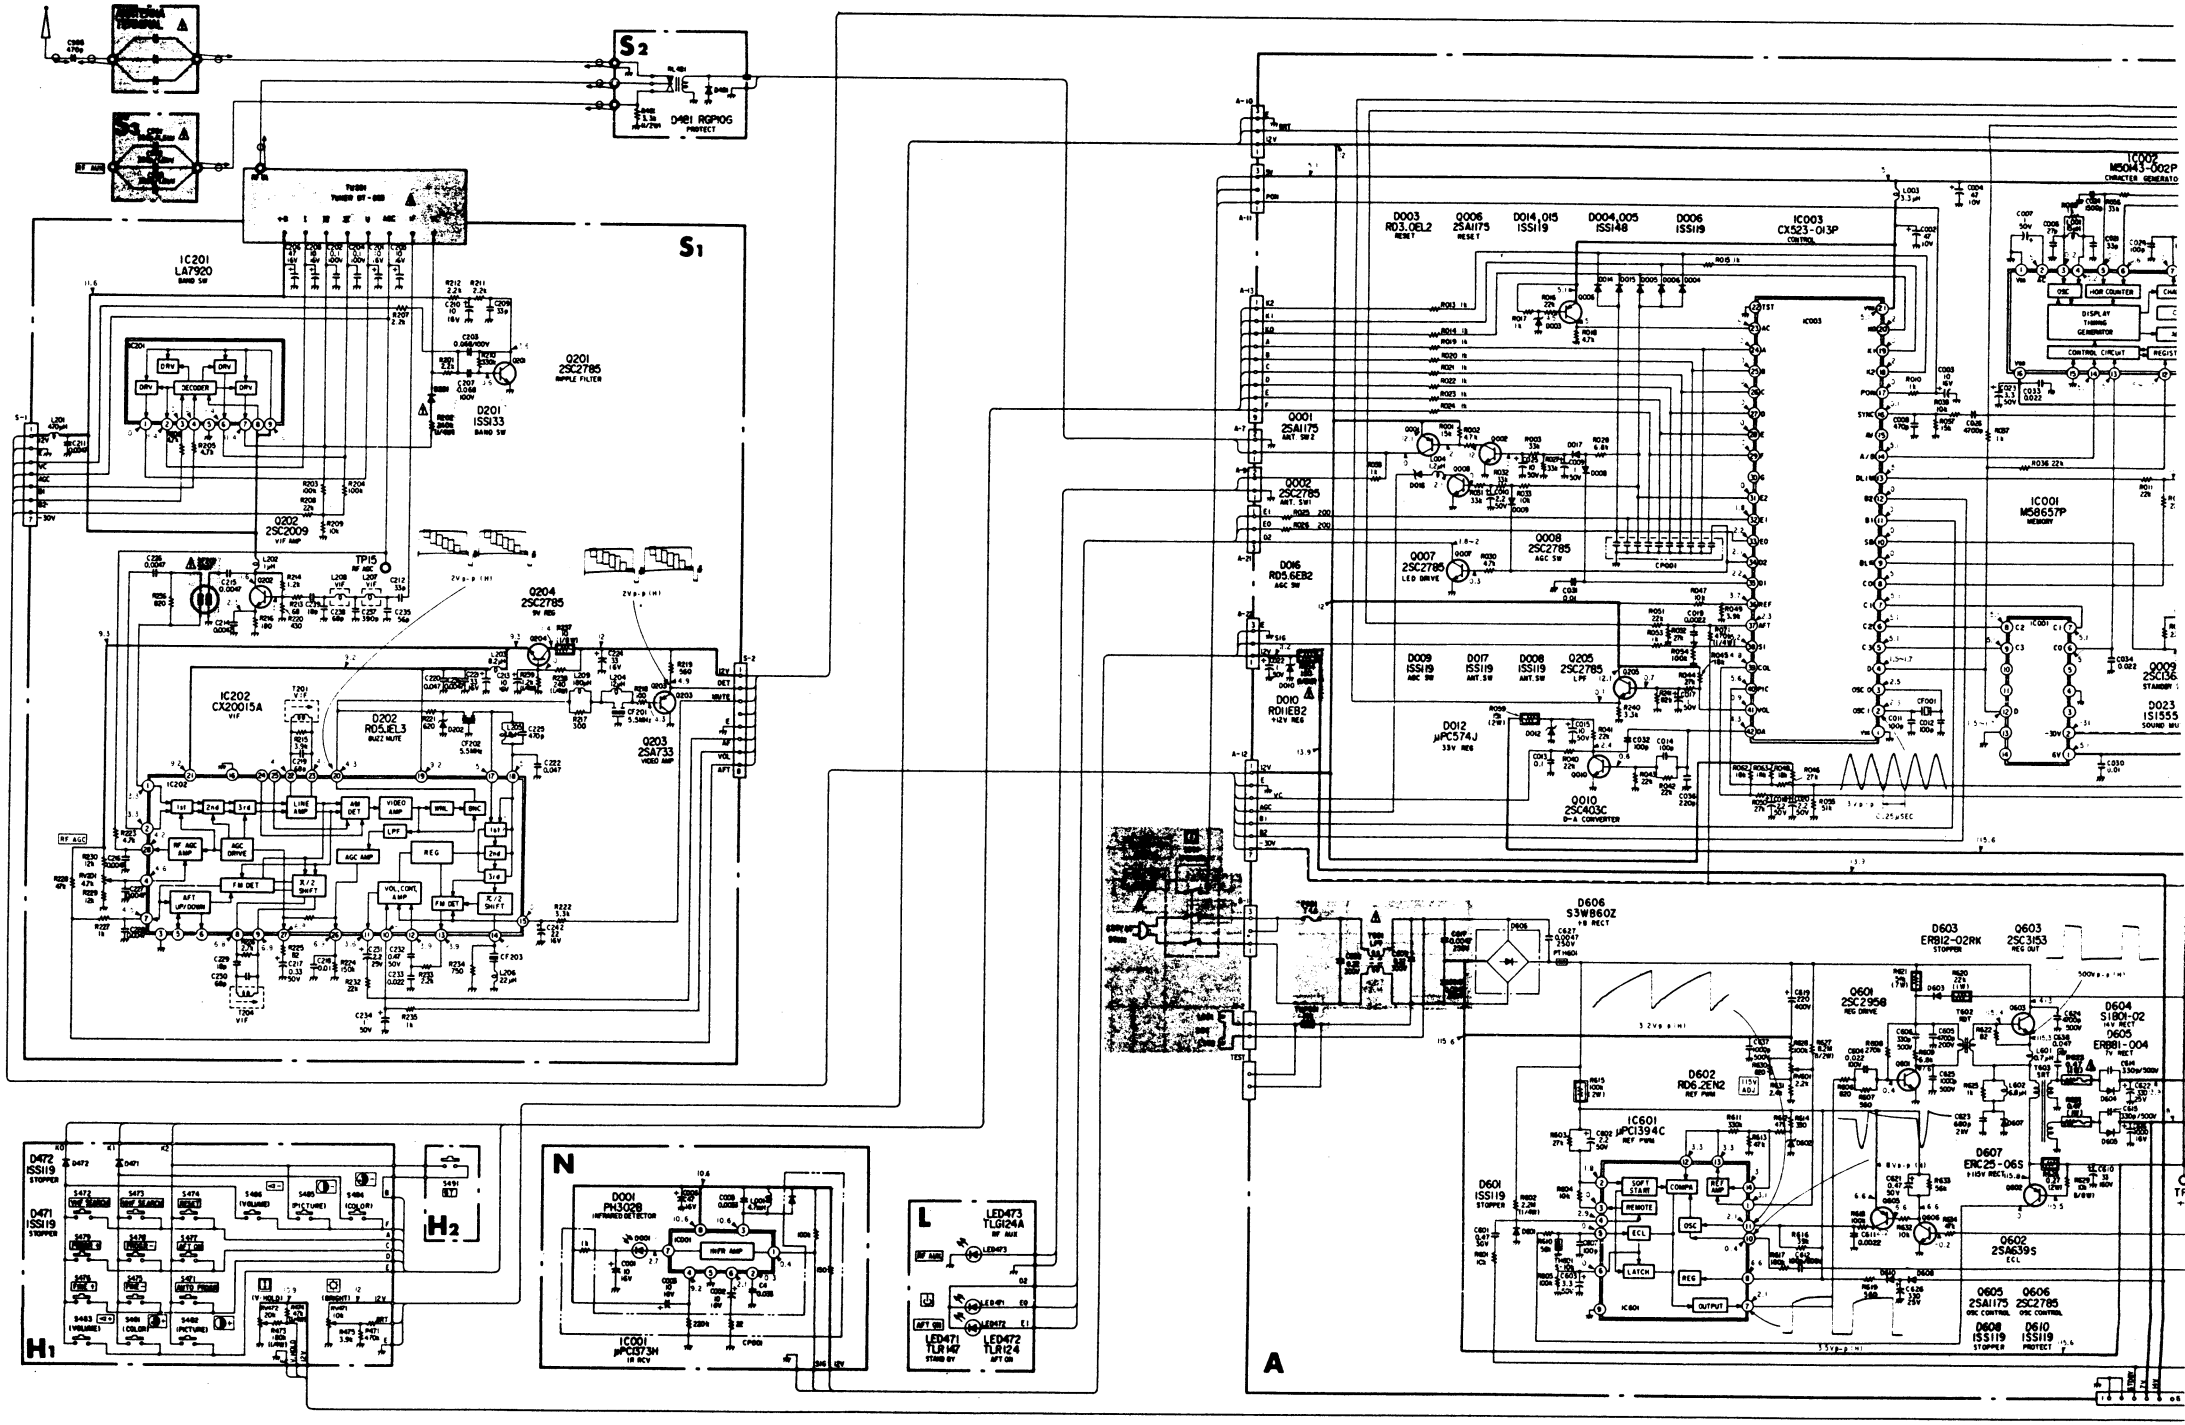
S2
S1
IC201
LA7920
IC202
CX20015A
VIF
Q201
2SC2785
RIPPLE FILTER
D201
ISS133
BAND SW
Q202
2SC2009
VIF AMP
Q204
2SC2785
5V REG
Q203
2SA733
VIDEO AMP
D202
RD5.1EL3
BUZZ MUTE
D016
RD5.6EB2
AGC SW
D010
RD11EB2
+12V REG
D012
μPC574J
33V REG
Q010
2SC403C
D-A CONVERTER
IC003
CX523-013P
CONTROL
IC002
M50743-002P
CHARACTER GENERATO
IC001
M58657P
MEMORY
D009
2SC136
STANDBY
D023
IS1555
SOUND MU
D606
S3WB60Z
+B RECT
D603
ERB12-02RK
STOPPER
Q603
2SC3153
REG OUT
Q601
2SC2958
REG DRIVE
D604
S180H-02
14V RECT
D605
ER881-004
7V RECT
D602
RD6.2EN2
REF PWR
IC601
μPC1394C
REF PWR
D601
ISS119
STOPPER
D607
ERC25-06S
115V RECT
Q602
2SA639S
ECL
Q605
2SA1175
OSC CONTROL
Q606
2SC2785
OSC CONTROL
D608
ISS119
STOPPER
D610
ISS119
PROTECT
D001
PH3028
INFRARED DETECTOR
IC001
μPC1373H
IR RCV
LED473
TLGL24A
RF AUX
LED471
TLR147
STAND BY
LED472
TLR124
AFT ON
D472
ISS119
STOPPER
D471
ISS119
STOPPER
H1
H2
N
L
A

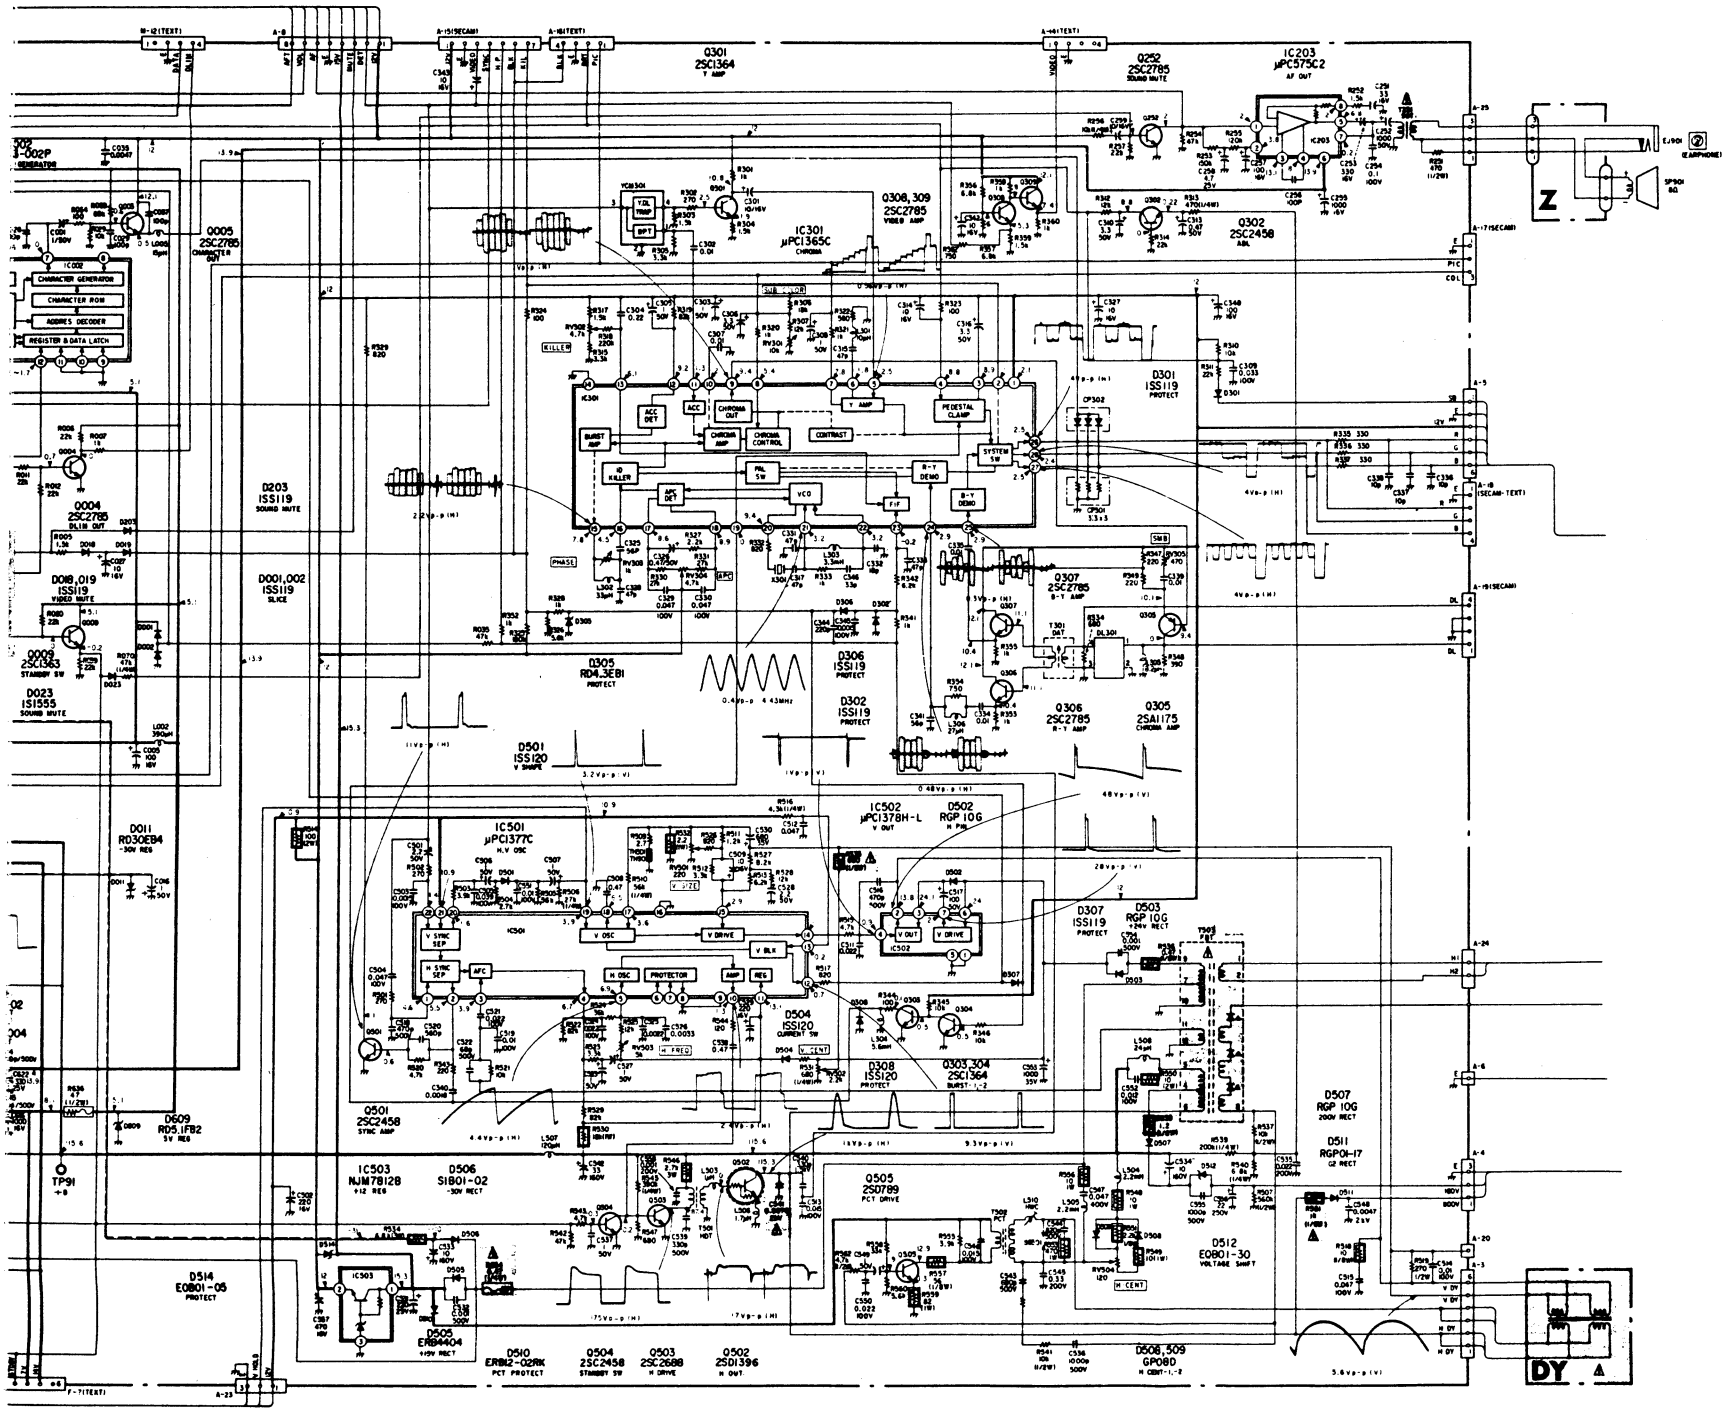

(KV1412ET only)

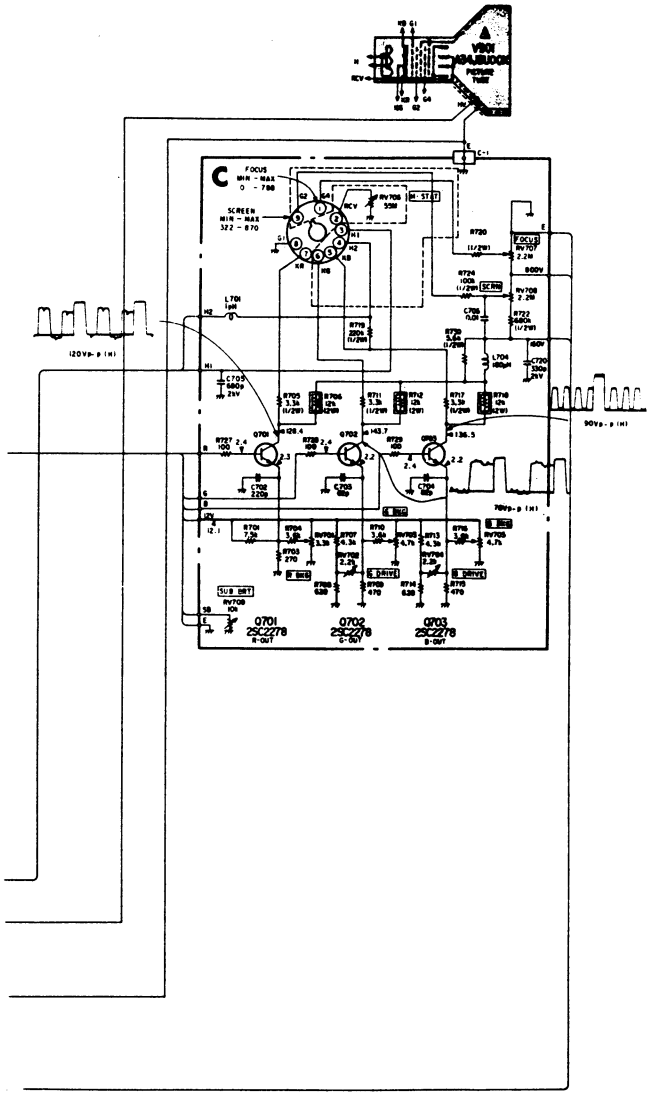

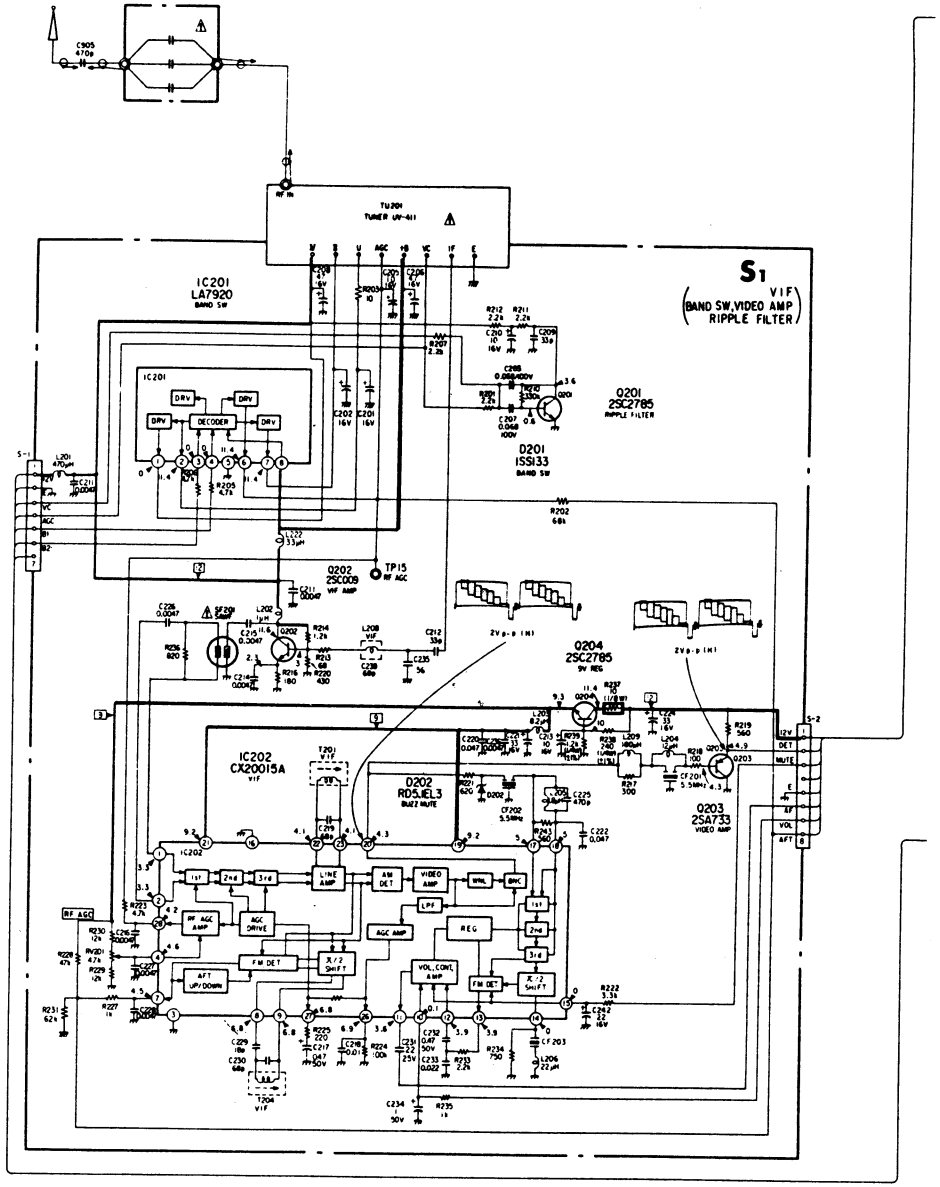

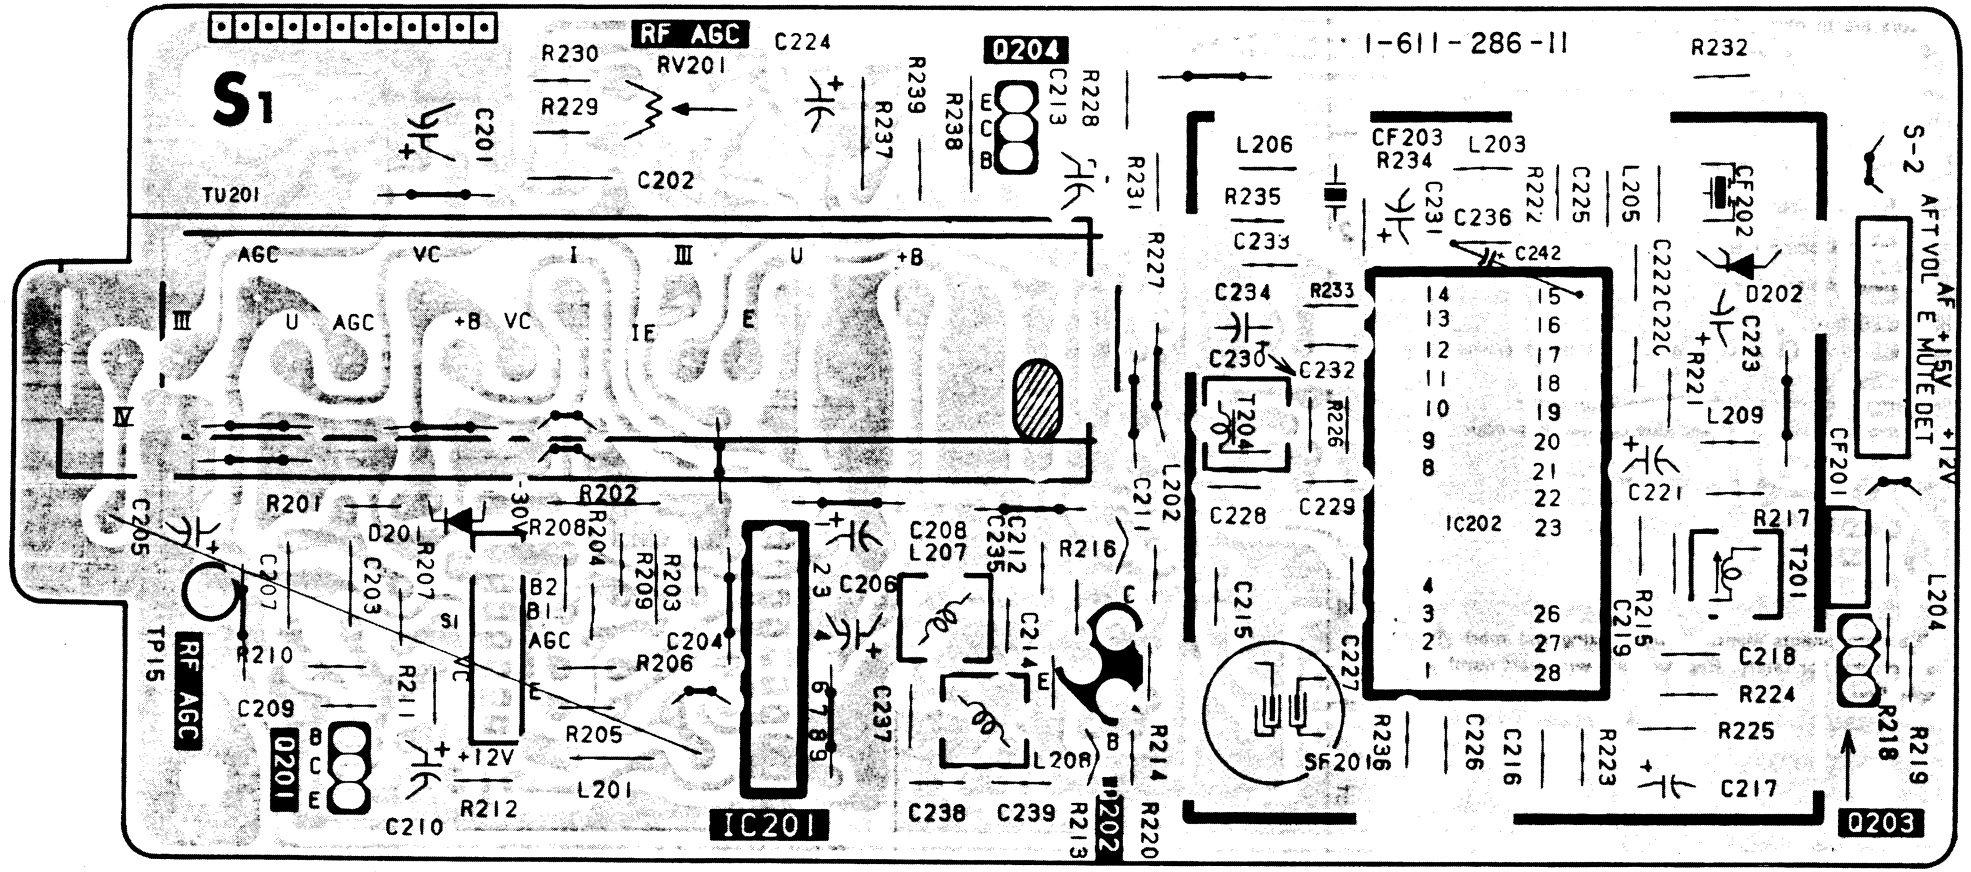
S1
TU201
C201
RF AGC
R230
RV201
R229
C202
C224
R239
R237
R238
Q204
C213
R228
R231
R227
1-611-286-11
R232
S-2
AFT VOL
AF
+15V
E MUTE DET
+12V
CF201
L206
R235
C233
C234
C230
T204
L202
C211
R233
C232
R226
C228
C229
CF203
R234
L203
C231
C236
C242
R222
C225
L205
C222C222C
CF202
D202
C223
R221
L209
C221
R217
T201
L204
R218
R219
C218
R224
R225
C217
Q203
C215
SF201
C227
R236
C226
C216
R223
C219
R215
IC202
AGC
VC
I
III
U
+B
IE
E
R201
R202
-30V
R208
R204
R203
R209
D201
R207
C203
C207
R210
C209
Q201
R211
C210
+12V
R212
L201
B2
B1
AGC
SI
VC
R205
R206
C204
C205
TP15
RF AGC
IC201
C206
C208
L207
C212
C235
C214
L208
C238
C239
R213
R216
R214
R220
Q202
C237

[C Board]

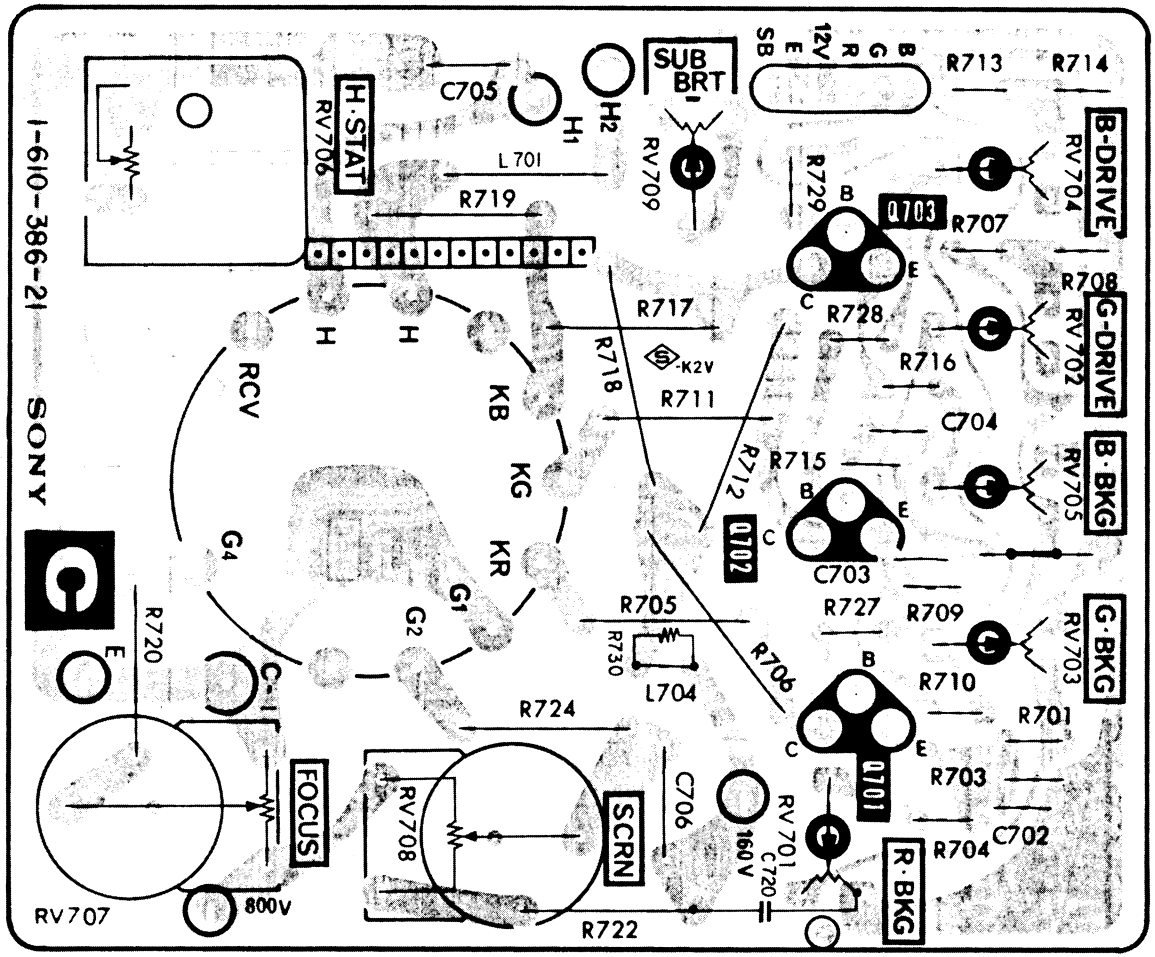

[H2 Board]



[S3 Board]

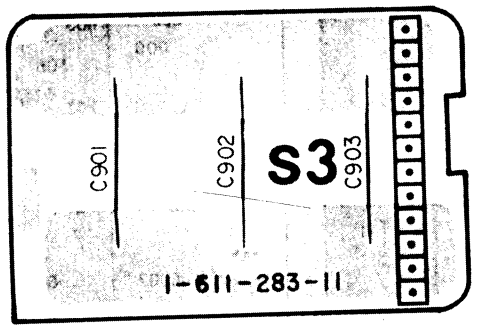

[S2 Board]

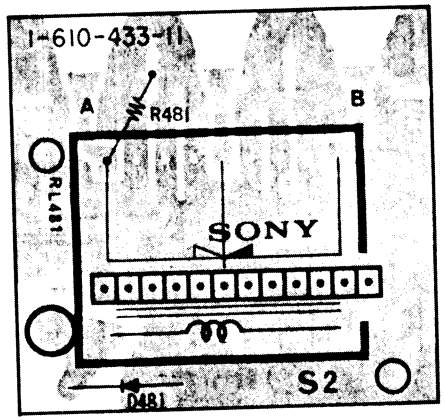

[H1 Board]

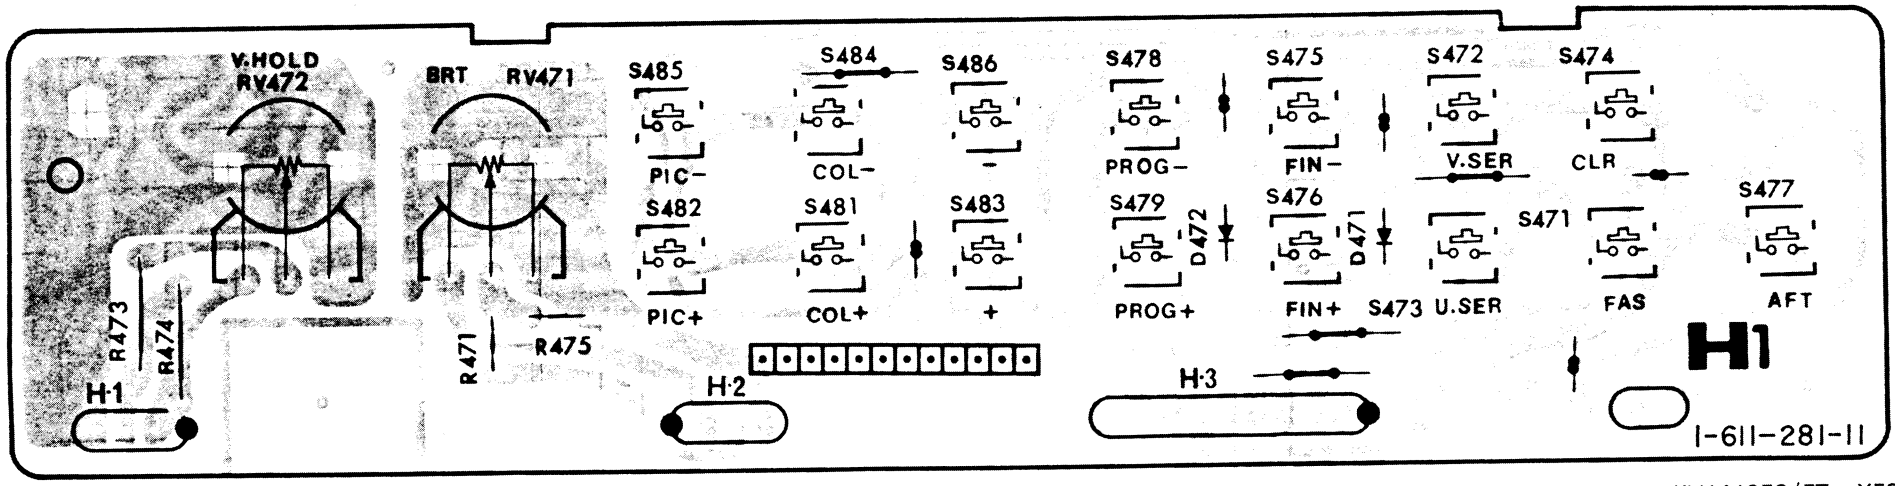

(KV1412ET only)

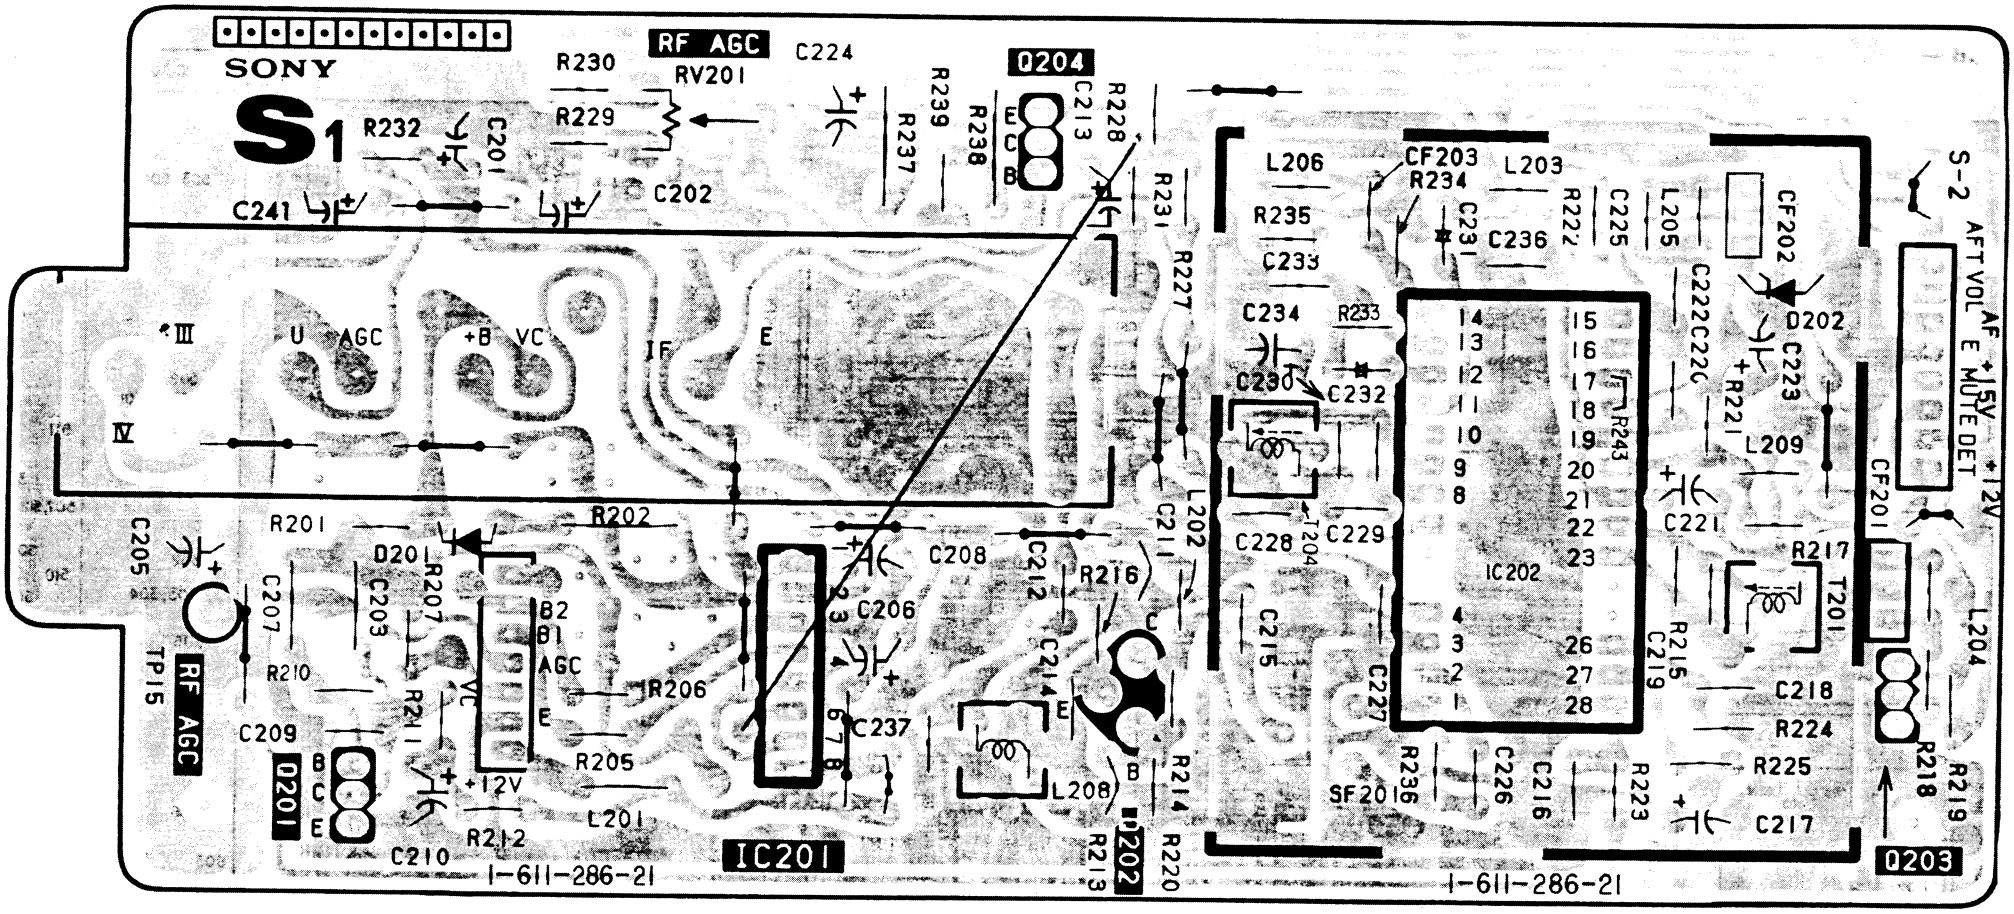

[L Board]

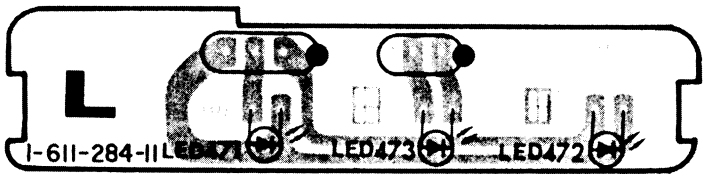

[N Board]

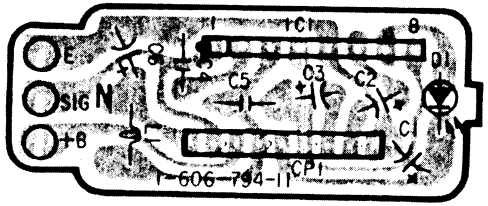

[Z Board]

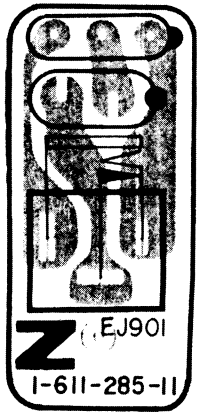

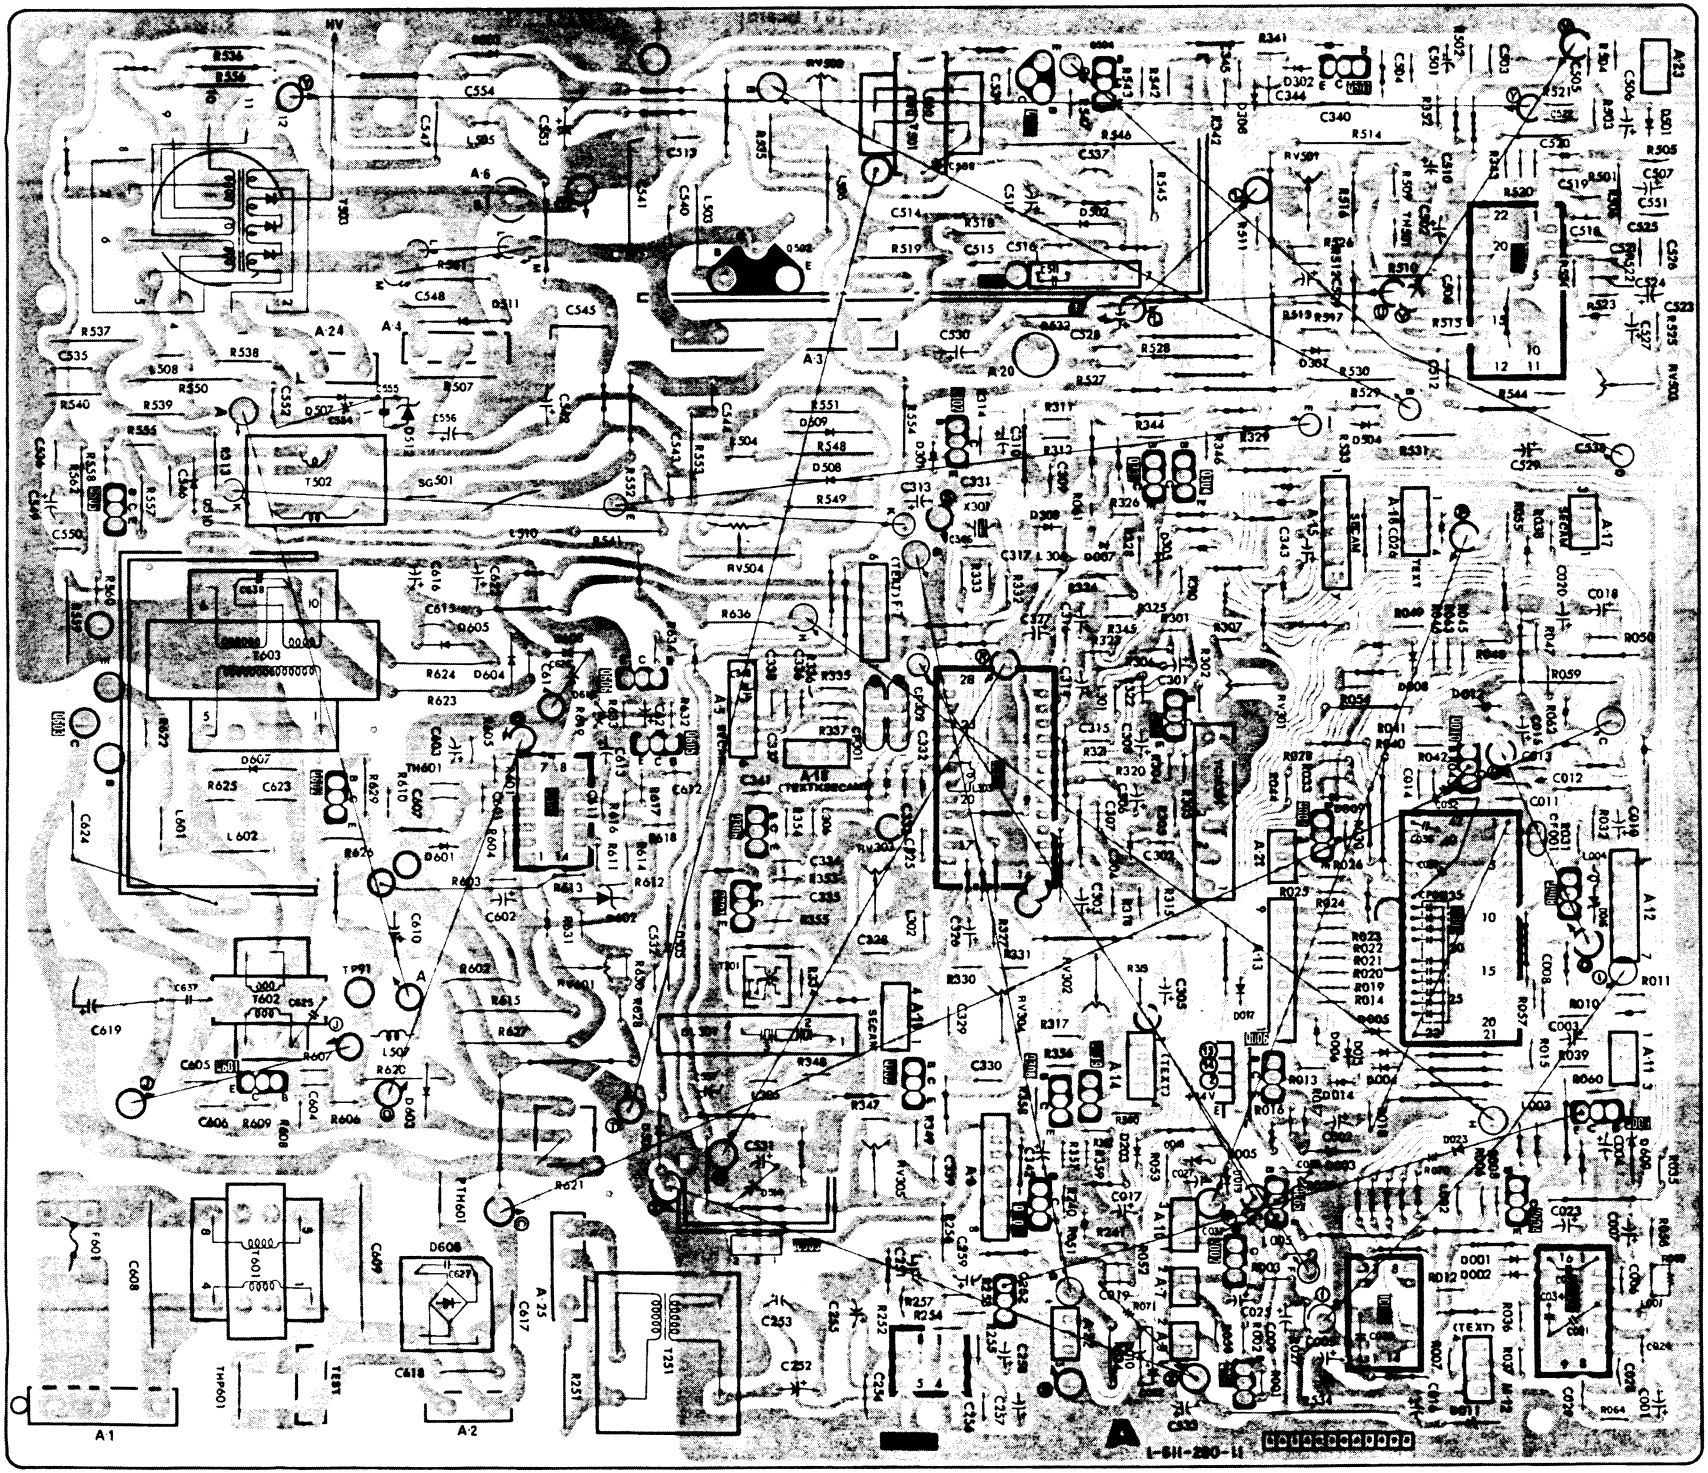

IC , Q	D	ADJ
	503 302	
	306 501	RV502
503 504 501		
		RV501
	502	
502 IC502 , IC501		
	511	
	307	
	507,512	RV503
	509 504	
302	510 301	
303,304	508	
505		
	308	
	305	RV504
	605,608	
	604 008	
606	610	RV301
	012	
603 301 605		
	607	
602, IC301 010 IC601 306 007		
	009	
	601	
		RV303
307 008 IC003	602 016	
	505	
	017	RV601 RV304 RV302
	005	
	006 015	
601 305 308 006 309 009	603 014 004	
	506 609	
	023,003	RV305
	203 018 514 019	
205 005 004		
IC503 002	001	
	002	
252 IC001 , IC002	606	
	010	
IC203 001		
	011	

EXPLODED VIEWS

NOTE:
- Items with no part number and no description are not stocked because they are seldom required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remark column.
- Items marked " ♦ " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

(1) BACK COVER

●: TA, BV3x12 7-685-648-71
△: TA, BV4x16 7-685-663-71

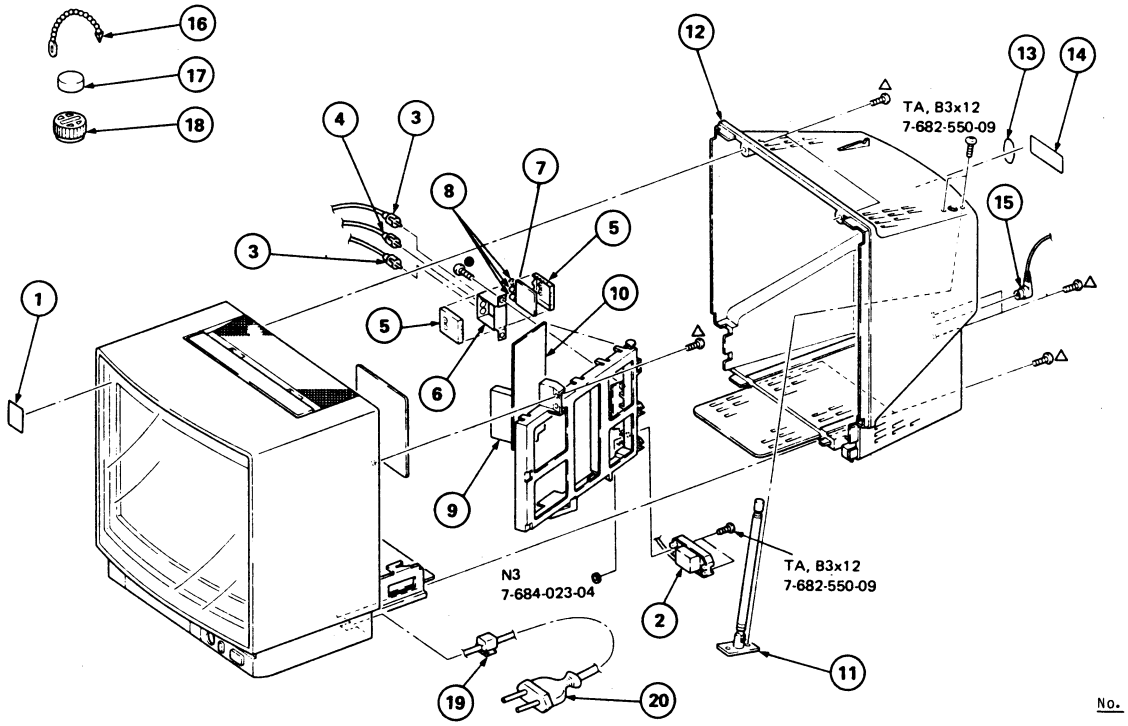

No.	Part No.	Description	Remark
1	3-703-705-01	STICKER, SONY SYMBOL (30)	
2	△1-536-683-00	CONNECTOR, COAXIAL ANTENNA	
3	♦:1-557-024-00	CABLE (WITH PIN)	
4	♦:1-557-056-00	CABLE, P-P	
5	♦:4-368-114-00	CASE (LID), RELAY	
6	♦:4-368-115-00	CASE (MAIN), RELAY	
7	♦:1-610-433-00	S2, BOARD	
8	♦:1-507-900-00	JACK	
9	△1-463-421-21	TUNER, ET (BT-883)	
10	♦:A-1355-079-A	S1 BOARD, COMPLETE	
11	1-501-152-00	ROD ANTENNA, TYPE B	
12	4-368-132-11	COVER, BACK	
13	3-703-269-00	LABEL, SEV	
14	♦:4-368-152-01	LABEL, MODEL NUMBER	
15	♦:1-556-565-21	CABLE (PAL.PIN)	
16	4-308-870-00	CLIP, LEAD WIRE	
17	1-452-032-00	MAGNET, DISK; 10MMφ	
18	1-452-094-00	MAGNET, ROTATABLE DISK;15MMφ	
19	△4-022-115-00	HOLDER, AC CORD	
20	△1-551-908-31	CORD, POWER, EULO PLUG	

(2) PICTURE TUBE

△: TA, BV4x16 7-685-663-71

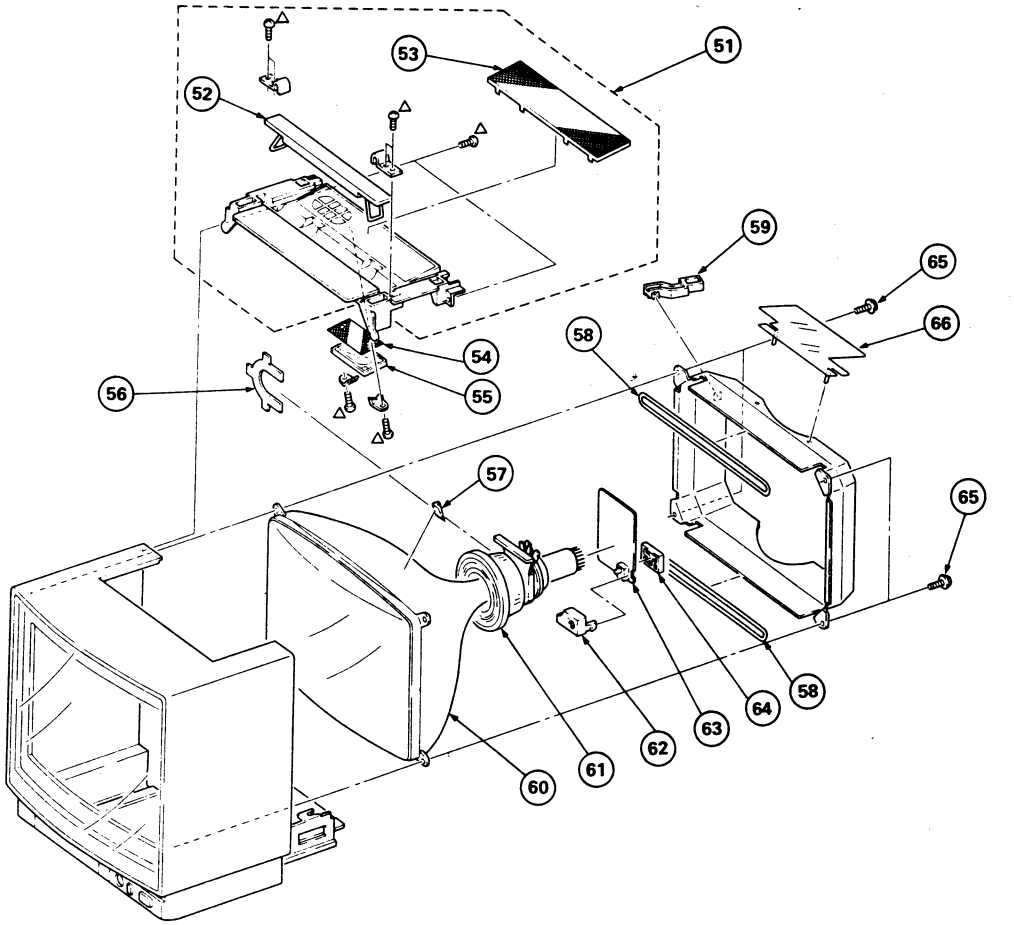

No.	Part No.	Description	Remark
51	X-4368-107-1	PLATE ASSY, TOP	52, 53
52	X-4368-106-1	HANDLE ASSY	
53	4-368-127-11	PLATE, ORNAMENTAL, SPEAKER	
54	♦:4-368-112-00	SHEET, DUST PROTECTION	
55	1-503-239-00	SPEAKER	
56	1-452-277-00	MAGNET, BMC	
57	3-703-003-00	SPACER, DY	
58	△1-426-145-00	COIL, DEGAUSSING	
59	♦:4-346-339-00	HOLDER, HV CABLE	
60	△8-735-550-05	CRT (A34JBU00X)	
61	△1-451-230-00	DEFLECTION YOKE (SY-125)	
62	♦:4-365-803-00	COVER (MAIN), CV CONTROL	
63	♦:A-1330-478-A	C BOARD, COMPLETE	
64	♦:4-365-804-00	COVER (REAR LID), CV CONTROL	
65	4-365-808-00	SCREW (5), TAPPING	
66	♦:4-368-138-00	INSULATOR	

(3) BEZEL ASSY

●: TA, BV3x12 7-685-648-71

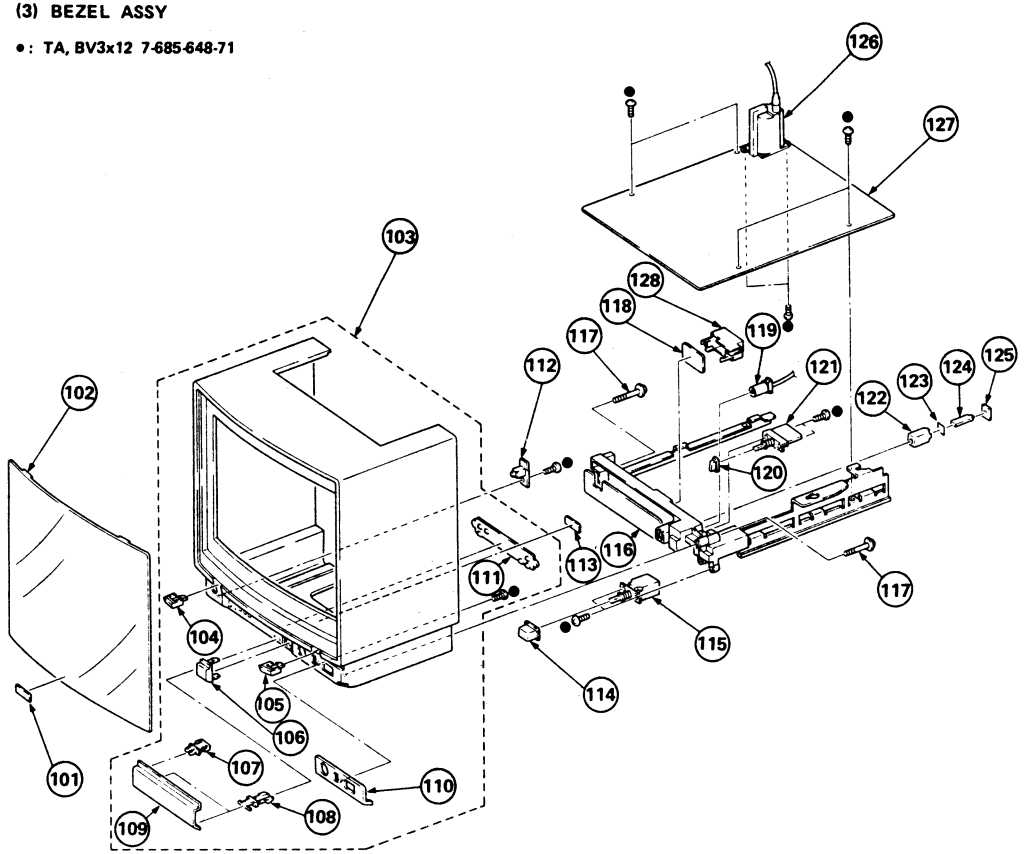

No.	Part No.	Description	Remark
101	♣:X-3701-079-0	EMBLEM (SMALL) ASSY, SONY	
102	4-368-129-00	FILTER	
103	X-4368-105-1	BEZEL ASSY	104-111
104	4-368-103-11	STOPPER (LEFT), FILTER	
105	4-368-104-11	STOPPER (RIGHT), FILTER	
106	♣:4-368-118-00	FILTER, RAY CATCHER	
107	4-352-034-00	CATCHER, PUSH	
108	4-334-917-00	SHAFT	
109	4-368-117-11	DOOR	
110	4-368-130-11	COVER, TERMINAL	
111	4-368-155-01	BUTTON (EC), MULTI	
112	♣:1-611-285-11	Z, BOARD	
113	♣:1-611-284-11	L, BOARD	
114	4-368-105-00	BUTTON, POWER	
115	⚠1-553-225-00	SWITCH, PUSH	
116	♣:1-611-281-11	H1, BOARD	
117	4-319-520-00	SCREW, SPECIAL (+PW4X30)	
118	♣:1-611-283-11	S3, BOARD	
119	1-557-194-11	SOCKET, PAL ANTENNA (WITH CABLE)	
120	4-368-106-00	BUTTON, SELECTION	
121	♣:1-611-282-11	H2, BOARD	
122	♣:4-342-117-00	CASE, SHIELD (MAIN), R	
123	♣:4-333-624-00	FILM (N), SPECIAL	
124	♣:1-606-794-00	N, BOARD	
125	♣:4-342-118-00	LID, SHIELD CASE, R	
126	⚠1-439-294-21	TRANSFORMER ASSY, FLYBACK	
127	♣:A-1295-807-A	A BOARD, COMPLETE	
128	♣:4-368-169-01	COVER, INSULATING	

A

ELECTRICAL PARTS LIST

• Items marked " ♣ " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

• All variable and adjustable resistors have characteristic curve B, unless otherwise noted.

CAPACITORS • MF : μF, PF : μμF

RESISTORS • All resistors are in ohms • F : nonflammable

COILS • MMH : mH, UH : μH

Ref.No.	Part No.	Description	Remark
	♣:A-1295-807-A	A BOARD, COMPLETE **********	
	4-303-483-00	HEAD, WASHER, TAPPING SCREW	
	♣:4-363-404-00	HOLDER, IC	
	4-363-414-00	SPACER, MICA	
	♣:4-370-012-01	HOLDER (REG OUT), TRANSISTOR	
		CONNECTOR	
A1	♣:1-506-349-21	3P PLUG (L)	
A2	♣:1-508-786-00	2P PLUG (M)	
A3	♣:1-564-038-00	CONNECTOR PLUG, DY (MINI) 6P	
A4	♣:1-508-765-00	3P PLUG (M)	
A5	♣:1-560-126-00	PLUG, CONNECTOR (2.5MM PITCH)	
A7	♣:1-560-290-00	PLUG, CONNECTOR (2.5MM PITCH)	
A8	♣:1-560-128-00	PLUG, CONNECTOR (2.5MM PITCH)	
A9	♣:1-560-290-00	PLUG, CONNECTOR (2.5MM PITCH)	
A10	♣:1-560-123-00	PLUG, CONNECTOR (2.5MM) 3P	
A11	♣:1-560-123-00	PLUG, CONNECTOR (2.5MM) 3P	
A12	♣:1-560-127-00	PLUG, CONNECTOR (2.5MM) 7P	
A13	♣:1-560-129-00	PLUG, CONNECTOR (2.5MM) 9P	
A14	♣:1-560-124-00	PLUG, CONNECTOR (2.5MM PITCH)	
A15	♣:1-560-127-00	PLUG, CONNECTOR (2.5MM PITCH)	
A16	♣:1-560-124-00	PLUG, CONNECTOR (2.5MM PITCH)	
A17	♣:1-560-123-00	PLUG, CONNECTOR (2.5MM PITCH)	
A18	♣:1-560-124-00	PLUG, CONNECTOR (2.5MM PITCH)	
A19	♣:1-560-124-00	PLUG, CONNECTOR (2.5MM PITCH)	
A20	♣:1-508-784-00	1P PLUG	
A21	♣:1-560-123-00	PLUG, CONNECTOR (2.5MM) 3P	
A22	♣:1-560-123-00	PLUG, CONNECTOR (2.5MM) 3P	
A23	♣:1-560-123-00	PLUG, CONNECTOR (2.5MM) 3P	
A24	♣:1-508-786-00	2P PLUG (M)	
A25	♣:1-508-765-00	3P PLUG (M)	
		CAPACITOR	
C001	1-123-380-00	ELECT 1MF 20% 50V	
C002	1-123-306-00	ELECT 47MF 20% 10V	
C003	1-123-356-00	ELECT 10MF 20% 16V	
C004	1-123-306-00	ELECT 47MF 20% 10V	
C005	1-123-333-00	ELECT 100MF 20% 16V	
C006	1-102-516-00	CERAMIC 27PF 5% 50V	
C007	1-123-380-00	ELECT 1MF 20% 50V	
C008	1-102-824-00	CERAMIC 470PF 5% 50V	
C009	1-123-380-00	ELECT 1MF 20% 50V	
C010	1-123-381-00	ELECT 2.2MF 20% 50V	
C011	1-102-973-00	CERAMIC 100PF 5% 50V	
C012	1-102-973-00	CERAMIC 100PF 5% 50V	
C013	1-130-632-00	FILM 0.1MF 5% 50V	
C014	1-102-973-00	CERAMIC 100PF 5% 50V	
C015	1-123-356-00	ELECT 10MF 20% 50V	
C016	1-123-380-00	ELECT 1MF 20% 50V	
C017	1-123-380-00	ELECT 1MF 20% 50V	
C018	1-123-381-00	ELECT 2.2MF 20% 50V	
C019	1-101-005-00	CERAMIC 0.022MF 50V	
C020	1-123-381-00	ELECT 2.2MF 20% 50V	
C021	1-102-963-00	CERAMIC 33PF 5% 50V	
C022	1-123-380-00	ELECT 1MF 20% 50V	
C023	1-123-354-00	ELECT 3.3MF 20% 50V	
C024	1-102-119-00	CERAMIC 0.0015MF 10% 50V	
C025	1-123-356-00	ELECT 10MF 20% 50V	
C026	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
C027	1-123-356-00	ELECT 10MF 20% 16V	
C028	1-102-973-00	CERAMIC 100PF 5% 50V	
C029	1-102-973-00	CERAMIC 100PF 5% 50V	
C030	1-101-004-00	CERAMIC 0.01MF 50V	
C031	1-101-004-00	CERAMIC 0.01MF 50V	
C032	1-102-973-00	CERAMIC 100PF 5% 50V	
C033	1-108-587-00	MYLAR 0.022MF 5% 50V	
C034	1-102-121-00	CERAMIC 0.0022MF 10% 50V	
C035	1-161-328-00	CERAMIC 0.0047ME 50V	
C036	1-102-978-00	CERAMIC 220PF 5% 50V	
C251	1-123-318-00	ELECT 33MF 20% 16V	
C252	1-123-364-00	ELECT 1000MF 20% 50V	
C253	1-123-322-00	ELECT 330MF 20% 16V	
C254	1-108-389-00	MYLAR 0.1MF 10% 100V	
C255	1-123-324-00	ELECT 1000MF 20% 16V	
C256	1-102-973-00	CERAMIC 100PF 5% 50V	
C257	1-123-333-00	ELECT 100MF 20% 16V	
C258	1-123-328-00	ELECT 4.7MF 20% 25V	
C259	1-123-356-00	ELECT 10MF 20% 16V	
C301	1-123-356-00	ELECT 10MF 20% 16V	
C302	1-101-004-00	CERAMIC 0.01MF 50V	
C303	1-123-380-00	ELECT 1MF 20% 50V	
C304	1-130-636-00	FILM 0.22MF 5% 50V	
C305	1-123-380-00	ELECT 1MF 20% 50V	
C306	1-123-354-00	ELECT 3.3MF 20% 50V	
C307	1-102-129-00	CERAMIC 0.01MF 10% 50V	
C308	1-123-380-00	ELECT 1MF 20% 50V	
C309	1-108-383-00	MYLAR 0.033MF 10% 100V	
C310	1-123-354-00	ELECT 3.3MF 20% 50V	
C313	1-123-379-00	ELECT 0.47MF 20% 50V	
C314	1-131-371-00	TANTALUM 10MF 20% 16V	
C315	1-101-880-00	CERAMIC 47PF 5% 50V	
C316	1-123-354-00	ELECT 3.3MF 20% 50V	
C317	1-102-852-00	CERAMIC 47PF 5% 50V	
C325	1-102-850-00	CERAMIC 56PF 5% 50V	
C326	1-123-379-00	ELECT 0.47MF 20% 50V	
C327	1-123-356-00	ELECT 10MF 20% 16V	
C328	1-102-887-00	CERAMIC 47PF 5% 50V	
C329	1-108-385-00	MYLAR 0.047MF 10% 100V	
C330	1-108-385-00	MYLAR 0.047MF 10% 100V	
C331	1-102-852-00	CERAMIC 47PF 5% 50V	
C332	1-102-513-00	CERAMIC 18PF 5% 50V	
C333	1-101-880-00	CERAMIC 47PF 5% 50V	
C334	1-102-129-00	CERAMIC 0.01MF 10% 50V	

Ref.No.	Part No.	Description			Remark
C335	1-102-129-00	CERAMIC	0.01MF	10%	50V
C336	1-102-947-00	CERAMIC	10PF	5%	50V
C337	1-102-947-00	CERAMIC	10PF	5%	50V
C338	1-102-947-00	CERAMIC	10PF	5%	50V
C339	1-102-129-00	CERAMIC	0.01MF	10%	50V
C340	1-108-561-00	MYLAR	0.0018MF	5%	50V
C341	1-102-523-00	CERAMIC	56PF	5%	50V
C342	1-123-356-00	ELECT	10MF	20%	16V
C343	1-123-356-00	ELECT	10MF	20%	16V
C344	1-102-978-00	CERAMIC	220PF	5%	50V
C345	1-108-367-00	MYLAR	0.0015MF	10%	100V
C346	1-102-518-00	CERAMIC	33PF	5%	50V
C348	1-123-333-00	ELECT	100MF	20%	16V
C501	1-123-381-00	ELECT	2.2MF	20%	50V
C502	1-123-321-00	ELECT	220MF	20%	16V
C503	1-108-367-00	MYLAR	0.0015MF	10%	100V
C504	1-108-385-00	MYLAR	0.047MF	10%	100V
C505	1-108-384-00	MYLAR	0.039MF	10%	100V
C506	1-123-380-00	ELECT	1MF	20%	50V
C507	1-123-380-00	ELECT	1MF	20%	50V
C508	1-130-640-00	FILM	0.47MF	5%	50V
C509	1-123-356-00	ELECT	10MF	20%	16V
C511	1-108-837-00	MYLAR	0.01MF	5%	50V
C512	1-108-595-00	MYLAR	0.047MF	5%	50V
C513	1-108-379-00	MYLAR	0.015MF	10%	100V
C514	1-108-377-00	MYLAR	0.01MF	10%	100V
C515	1-108-385-00	MYLAR	0.047MF	10%	100V
C516	1-102-228-00	CERAMIC	470PF	10%	500V
C517	1-123-360-00	ELECT	100MF	20%	50V
C518	1-102-228-00	CERAMIC	470PF	10%	500V
C519	1-108-377-00	MYLAR	0.01MF	10%	100V
C520	1-102-115-00	CERAMIC	560PF	10%	50V
C521	1-108-381-00	MYLAR	0.022MF	10%	100V
C522	1-102-989-00	CERAMIC	68PF	10%	500V
C523	1-123-380-00	ELECT	1MF	20%	50V
C524	1-108-381-00	MYLAR	0.022MF	10%	100V
C525	1-108-230-00	MYLAR	0.0022MF	10%	50V
C526	1-130-024-00	FILM	0.0033MF	5%	50V
C527	1-123-380-00	ELECT	1MF	20%	50V
C528	1-123-381-00	ELECT	2.2MF	20%	50V
C529	1-123-321-00	ELECT	220MF	20%	16V
C530	1-124-190-00	ELECT	680MF	10%	35V
C531	1-123-334-00	ELECT	220MF	20%	25V
C532	1-102-038-00	CERAMIC	0.001MF		500V
C533	1-121-999-00	ELECT	10MF		160V
C534	1-121-999-00	ELECT	10MF		160V
C535	1-108-425-00	MYLAR	0.022MF	10%	200V
C536	1-102-038-00	CERAMIC	0.001MF		500V
C537	1-123-228-00	ELECT	1MF	20%	50V
C538	1-130-640-00	FILM	0.47MF	5%	50V
C539	1-102-030-00	CERAMIC	330PF	10%	500V
C540	1-102-327-00	CERAMIC	330PF	15%	1.5KV

Ref.No.	Part No.	Description			Remark
C541	⚠1-136-061-00	FILM	0.0078MF	3%	2KV
C542	1-123-024-00	ELECT	33MF		160V
C543	1-102-002-00	CERAMIC	680PF	10%	500V
C544	1-102-212-00	CERAMIC	820PF	10%	500V
C545	1-130-684-00	FILM	0.33MF	5%	200V
C546	1-108-379-00	MYLAR	0.015MF	10%	100V
C547	1-136-060-00	FILM	0.047MF	5%	400V
C548	1-102-223-00	CERAMIC	0.0047MF	10%	2KV
C549	1-123-380-00	ELECT	1MF	20%	50V
C550	1-108-381-00	MYLAR	0.022MF	10%	100V
C551	1-108-377-00	MYLAR	0.01MF	10%	100V
C552	1-108-621-11	MYLAR	0.012MF	10%	100V
C553	1-123-349-00	ELECT	1000MF	20%	35V
C554	1-102-038-00	CERAMIC	0.001MF		500V
C555	1-102-038-00	CERAMIC	0.001MF		500V
C556	1-123-005-00	ELECT	22MF		250V
C557	1-123-323-00	ELECT	470MF	20%	16V
C558	1-108-680-00	FILM	0.001MF		200V
C601	1-123-021-00	ELECT	0.47MF	30%	50V
C602	1-123-381-00	ELECT	2.2MF	20%	50V
C603	1-123-354-00	ELECT	3.3MF	20%	50V
C604	1-108-381-00	MYLAR	0.022MF	10%	100V
C605	1-108-417-00	MYLAR	0.0047MF	10%	200V
C606	1-102-030-00	CERAMIC	330PF	10%	500V
C607	1-102-973-00	CERAMIC	100PF	5%	50V
C608	⚠1-108-745-00	MYLAR	0.22MF	20%	300V
C609	⚠1-108-745-00	MYLAR	0.22MF	20%	300V
C610	1-123-024-00	ELECT	33MF		160V
C611	1-108-563-00	MYLAR	0.0022MF	5%	50V
C612	1-101-810-00	CERAMIC	100PF	5%	500V
C614	1-102-030-00	CERAMIC	330PF	10%	500V
C615	1-102-030-00	CERAMIC	330PF	10%	500V
C616	1-123-324-00	ELECT	1000MF	20%	16V
C617	⚠1-161-964-00	CERAMIC	0.0047MF		250V
C618	⚠1-161-964-00	CERAMIC	0.0047MF		250V
C619	1-125-318-00	ELECT(BLOCK)	220MF	20%	400V
C621	1-123-379-00	ELECT	0.47MF	20%	50V
C622	1-123-335-00	ELECT	330MF	20%	25V
C623	1-162-116-00	CERAMIC	680PF	10%	2KV
C624	1-161-830-00	CERAMIC	0.0047MF		500V
C625	1-102-038-00	CERAMIC	0.001MF		500V
C626	1-123-335-00	ELECT	330MF		25V
C627	1-161-946-00	CERAMIC	0.0047MF		250V
C637	1-102-038-00	CERAMIC	0.001MF		500V
C638	1-101-006-00	CERAMIC	0.047MF		50V

FILTER

CF001	1-527-790-00	OSCILLATOR, CERAMIC

DIODE

D001	8-719-911-19	DIODE 1SS119
D002	8-719-911-19	DIODE 1SS119
D003	8-719-101-35	DIODE RD3.0E-L2
D004	8-719-911-19	DIODE 1SS119
D005	8-719-911-19	DIODE 1SS119
D006	8-719-911-19	DIODE 1SS119
D008	8-719-911-19	DIODE 1SS119
D009	8-719-911-19	DIODE 1SS119
D010	8-719-100-61	DIODE RD11E-B2
D011	8-719-101-02	DIODE RD30E-B4
D012	8-759-157-40	IC UPC574J
D014	8-719-911-19	DIODE 1SS119
D015	8-719-911-19	DIODE 1SS119
D016	8-719-100-35	DIODE RD5.6E-B2
D017	8-719-911-19	DIODE 1SS119
D018	8-719-911-19	DIODE 1SS119
D019	8-719-911-19	DIODE 1SS119
D023	8-719-911-19	DIODE 1SS119
D203	8-719-911-19	DIODE 1SS119
D301	8-719-911-19	DIODE 1SS119
D302	8-719-911-19	DIODE 1SS119
D305	8-719-100-22	DIODE RD4.3E-B1
D306	8-719-911-19	DIODE 1SS119
D307	8-719-911-19	DIODE 1SS119
D308	8-719-911-19	DIODE 1SS119
D501	8-719-911-19	DIODE 1SS119
D502	8-719-924-06	DIODE ERC24-06S
D503	8-719-924-06	DIODE ERC24-06S
D504	8-719-911-19	DIODE 1SS119
D505	8-719-901-93	DIODE V19E
D506	8-719-200-02	DIODE 10E2
D507	8-719-924-06	DIODE ERC24-06S
D508	8-719-920-04	DIODE ERB12-04RK
D509	8-719-920-04	DIODE ERB12-04RK
D510	8-719-920-04	DIODE ERB12-04RK
D511	8-719-300-65	DIODE ES1F
D512	8-719-931-30	DIODE EQB01-30
D514	8-719-931-05	DIODE EQB01-05
D601	8-719-911-19	DIODE 1SS119
D602	8-719-102-74	DIODE RD6.2E-N2
D603	8-719-920-04	DIODE ERB12-04RK
D604	8-719-200-02	DIODE 10E2
D605	8-719-982-04	DIODE ERB81-004
D606	8-719-503-06	DIODE S3WB60Z
D607	8-719-925-06	DIODE ERC25-06S
D608	8-719-911-19	DIODE 1SS119
D609	8-719-160-23	DIODE RD5.1F-B2
D610	8-719-911-19	DIODE 1SS119

DELAY LINE

DL301	1-415-122-31	DELAY LINE

CONNECTOR

F7	♦:1-560-126-00	PLUG, CONNECTOR (2.5MM PITCH)

FUSE

F601	⚠ 1-532-350-00	FUSE, TIME-LAG 7AA
	1-533-087-00	HOLDER,FUSE; F601

IC

IC001	8-759-600-92	IC M58657P
IC002	8-759-600-62	IC M50143-002P
IC003	8-759-600-89	IC CX523-013P
IC203	8-759-157-52	IC UPC575C
IC301	8-759-113-65	IC UPC1365C
IC501	8-759-100-60	IC UPC1377C
IC502	8-759-113-78	IC UPC1378H-L
IC503	8-759-700-06	IC NJM7812B
	♦:4-323-833-00	HEAT SINK, PIN OUT; IC503
IC601	8-759-100-75	IC UPC1394C

COIL

L001	1-408-411-00	MICRO INDUCTOR 15UH
L002	1-408-428-00	MICRO INDUCTOR 390UH
L003	1-408-403-00	MICRO INDUCTOR 3.3UH
L004	1-407-179-00	MICRO INDUCTOR 1.2UH
L005	1-408-605-00	MICRO INDUCTOR 15UH
L301	1-408-409-00	MICRO INDUCTOR 10UH
L302	1-408-415-00	MICRO INDUCTOR 33UH
L303	1-408-942-00	MICRO INDUCTOR 3.3MMH
L304	1-407-501-00	MICRO INDUCTOR 5.6MMH
L305	1-408-408-00	MICRO INDUCTOR 8.2UH
L306	1-408-414-00	MICRO INDUCTOR 27UH
L503	1-408-349-00	COIL, CHOKE 1UH
L504	1-407-496-00	MICRO INDUCTOR 2.2MMH
L505	1-407-496-00	MICRO INDUCTOR 2.2MMH
L506	1-407-366-00	RF CHOKE COIL 1.7UH
L507	1-459-215-00	CORE COIL 120UH
L508	1-459-404-00	COIL (WITH CORE) 24UH
L510	1-459-348-00	COIL, VAR, FERRITE (HWC)
L601	1-407-365-00	COIL, CHOKE (HIGH FREQUENCY) 0.7UH
L602	1-408-300-00	MICRO INDUCTOR 6.8UH

CONNECTOR

M12	♦:1-560-124-00	PLUG, CONNECTOR (2.5MM PITCH) 4P

THERMISTOR

PTH601	1-800-820-00	THERMISTOR, POWER

TRANSISTOR

Q001	8-729-204-83	TRANSISTOR 2SA1048-GR
Q002	8-729-245-83	TRANSISTOR 2SC2458
Q004	8-729-245-83	TRANSISTOR 2SC2458
Q005	8-729-245-83	TRANSISTOR 2SC2458
Q006	8-729-204-83	TRANSISTOR 2SA1048-GR
Q007	8-729-245-83	TRANSISTOR 2SC2458
Q008	8-729-245-83	TRANSISTOR 2SC2458
Q009	8-729-245-83	TRANSISTOR 2SC2458
Q010	8-724-375-01	TRANSISTOR 2SC403C
Q205	8-729-245-83	TRANSISTOR 2SC2458
Q252	8-729-245-83	TRANSISTOR 2SC2458

A

Ref.No.	Part No.	Description				Remark
Q301	8-729-245-83	TRANSISTOR 2SC2458				
Q302	8-729-245-83	TRANSISTOR 2SC2458				
Q303	8-729-245-83	TRANSISTOR 2SC2458				
Q304	8-729-245-83	TRANSISTOR 2SC2458				
Q305	8-729-204-83	TRANSISTOR 2SA1048-GR				
Q306	8-729-245-83	TRANSISTOR 2SC2458				
Q307	8-729-245-83	TRANSISTOR 2SC2458				
Q308	8-729-245-83	TRANSISTOR 2SC2458				
Q309	8-729-245-83	TRANSISTOR 2SC2458				
Q501	8-729-245-83	TRANSISTOR 2SC2458				
Q502	8-729-801-71	TRANSISTOR 2SD1396				
Q503	8-729-168-82	TRANSISTOR 2SC2688				
Q504	8-729-245-83	TRANSISTOR 2SC2458				
Q505	8-729-177-43	TRANSISTOR 2SD774				
Q601	8-729-195-82	TRANSISTOR 2SC2958				
Q602	8-729-163-93	TRANSISTOR 2SA639S				
Q603	8-729-801-69	TRANSISTOR 2SC3153				
Q605	8-729-204-83	TRANSISTOR 2SA1048-GR				
Q606	8-729-245-83	TRANSISTOR 2SC2458				
		RESISTOR				
R001	1-247-859-00	CARBON	15K	5%	1/6W	
R002	1-247-847-00	CARBON	4.7K	5%	1/6W	
R003	1-247-867-00	CARBON	33K	5%	1/6W	
R005	1-247-835-00	CARBON	1.5K	5%	1/6W	
R006	1-247-863-00	CARBON	22K	5%	1/6W	
R007	1-247-831-00	CARBON	1K	5%	1/6W	
R008	1-247-875-00	CARBON	68K	5%	1/6W	
R010	1-247-831-00	CARBON	1K	5%	1/6W	
R011	1-247-863-00	CARBON	22K	5%	1/6W	
R012	1-247-863-00	CARBON	22K	5%	1/6W	
R013	1-247-831-00	CARBON	1K	5%	1/6W	
R014	1-247-831-00	CARBON	1K	5%	1/6W	
R015	1-247-831-00	CARBON	1K	5%	1/6W	
R016	1-247-863-00	CARBON	22K	5%	1/6W	
R017	1-247-831-00	CARBON	1K	5%	1/6W	
R018	1-247-847-00	CARBON	4.7K	5%	1/6W	
R019	1-247-831-00	CARBON	1K	5%	1/6W	
R020	1-247-831-00	CARBON	1K	5%	1/6W	
R021	1-247-831-00	CARBON	1K	5%	1/6W	
R022	1-247-831-00	CARBON	1K	5%	1/6W	
R023	1-247-831-00	CARBON	1K	5%	1/6W	
R024	1-247-831-00	CARBON	1K	5%	1/6W	
R025	1-247-814-00	CARBON	200	5%	1/6W	
R026	1-247-814-00	CARBON	200	5%	1/6W	
R027	1-247-867-00	CARBON	33K	5%	1/6W	
R028	1-247-851-00	CARBON	6.8K	5%	1/6W	
R029	1-247-855-00	CARBON	10K	5%	1/6W	
R030	1-247-847-00	CARBON	4.7K	5%	1/6W	
R031	1-247-867-00	CARBON	33K	5%	1/6W	
R032	1-247-867-00	CARBON	33K	5%	1/6W	
R033	1-247-855-00	CARBON	10K	5%	1/6W	
R034	⚠1-246-991-00	CARBON	150	5%	1/8W	F

Ref.No.	Part No.	Description				Remark
R035	1-247-871-00	CARBON	47K	5%	1/6W	
R036	1-247-863-00	CARBON	22K	5%	1/6W	
R037	1-247-831-00	CARBON	1K	5%	1/6W	
R038	1-247-855-00	CARBON	10K	5%	1/6W	
R039	1-247-863-00	CARBON	22K	5%	1/6W	
R040	1-247-863-00	CARBON	22K	5%	1/6W	
R041	1-247-863-00	CARBON	22K	5%	1/6W	
R042	1-247-863-00	CARBON	22K	5%	1/6W	
R043	1-247-863-00	CARBON	22K	5%	1/6W	
R044	1-247-865-00	CARBON	27K	5%	1/6W	
R045	1-247-861-00	CARBON	18K	5%	1/6W	
R046	1-247-865-00	CARBON	27K	5%	1/6W	
R047	1-247-855-00	CARBON	10K	5%	1/6W	
R048	1-247-861-00	CARBON	18K	5%	1/6W	
R049	1-247-845-00	CARBON	3.9K	5%	1/6W	
R050	1-247-865-00	CARBON	27K	5%	1/6W	
R051	1-247-863-00	CARBON	22K	5%	1/6W	
R052	1-247-877-00	CARBON	82K	5%	1/6W	
R053	1-247-831-00	CARBON	1K	5%	1/6W	
R054	1-247-879-00	CARBON	100K	5%	1/6W	
R055	1-247-872-00	CARBON	51K	5%	1/6W	
R056	1-247-867-00	CARBON	33K	5%	1/6W	
R057	1-247-859-00	CARBON	15K	5%	1/6W	
R058	1-247-831-00	CARBON	1K	5%	1/6W	
R059	1-206-692-00	METAL OXIDE	15K	5%	2W	F
R060	1-247-863-00	CARBON	22K	5%	1/6W	
R062	1-247-861-00	CARBON	18K	5%	1/6W	
R063	1-247-861-00	CARBON	18K	5%	1/6W	
R064	1-247-807-00	CARBON	100	5%	1/6W	
R069	1-247-831-00	CARBON	1K	5%	1/6W	
R070	1-246-513-00	CARBON	47K	5%	1/4W	
R071	1-246-537-00	CARBON	470K	5%	1/4W	
R240	1-247-843-00	CARBON	3.3K	5%	1/6W	
R241	1-247-877-00	CARBON	82K	5%	1/6W	
R251	1-244-865-51	CARBON	470	5%	1/2W	
R252	1-247-835-00	CARBON	1.5K	5%	1/6W	
R253	1-247-883-00	CARBON	150K	5%	1/6W	
R254	1-247-871-00	CARBON	47K	5%	1/6W	
R255	1-247-881-00	CARBON	120K	5%	1/6W	
R256	1-246-497-00	CARBON	10K	5%	1/4W	
R257	1-247-863-00	CARBON	22K	5%	1/6W	
R301	1-247-831-00	CARBON	1K	5%	1/6W	
R302	1-247-817-00	CARBON	270	5%	1/6W	
R303	1-247-835-00	CARBON	1.5K	5%	1/6W	
R304	1-247-835-00	CARBON	1.5K	5%	1/6W	
R305	1-247-843-00	CARBON	3.3K	5%	1/6W	
R306	1-247-861-00	CARBON	18K	5%	1/6W	
R307	1-247-857-00	CARBON	12K	5%	1/6W	
R310	1-247-855-00	CARBON	10K	5%	1/6W	
R311	1-247-863-00	CARBON	22K	5%	1/6W	
R312	1-247-857-00	CARBON	12K	5%	1/6W	
R313	1-246-465-00	CARBON	470	5%	1/4W	
R314	1-247-863-00	CARBON	22K	5%	1/6W	
R315	1-247-843-00	CARBON	3.3K	5%	1/6W	
R317	1-247-835-00	CARBON	1.5K	5%	1/6W	

A

Ref.No.	Part No.	Description				Remark
R318	1-247-887-00	CARBON	220K	5%	1/6W	
R319	1-247-877-00	CARBON	82K	5%	1/6W	
R320	1-247-831-00	CARBON	1K	5%	1/6W	
R321	1-247-831-00	CARBON	1K	5%	1/6W	
R322	1-247-825-00	CARBON	560	5%	1/6W	
R323	1-247-807-00	CARBON	100	5%	1/6W	
R324	1-247-807-00	CARBON	100	5%	1/6W	
R325	1-247-885-00	CARBON	180K	5%	1/6W	
R326	1-247-849-00	CARBON	5.6K	5%	1/6W	
R327	1-247-839-00	CARBON	2.2K	5%	1/6W	
R328	1-247-831-00	CARBON	1K	5%	1/6W	
R329	1-247-829-00	CARBON	820	5%	1/6W	
R330	1-247-865-00	CARBON	27K	5%	1/6W	
R331	1-247-865-00	CARBON	27K	5%	1/6W	
R332	1-247-829-00	CARBON	820	5%	1/6W	
R333	1-247-831-00	CARBON	1K	5%	1/6W	
R334	1-247-827-00	CARBON	680	5%	1/6W	
R335	1-247-819-00	CARBON	330	5%	1/6W	
R336	1-247-819-00	CARBON	330	5%	1/6W	
R337	1-247-819-00	CARBON	330	5%	1/6W	
R341	1-247-831-00	CARBON	1K	5%	1/6W	
R342	1-247-850-00	CARBON	6.2K	5%	1/6W	
R343	1-247-815-00	CARBON	220	5%	1/6W	
R344	1-247-807-00	CARBON	100	5%	1/6W	
R345	1-247-855-00	CARBON	10K	5%	1/6W	
R346	1-247-855-00	CARBON	10K	5%	1/6W	
R347	1-247-815-00	CARBON	220	5%	1/6W	
R348	1-247-821-00	CARBON	390	5%	1/6W	
R349	1-247-815-00	CARBON	220	5%	1/6W	
R352	1-247-831-00	CARBON	1K	5%	1/6W	
R353	1-247-831-00	CARBON	1K	5%	1/6W	
R354	1-247-828-00	CARBON	750	5%	1/6W	
R355	1-247-831-00	CARBON	1K	5%	1/6W	
R356	1-247-851-00	CARBON	6.8K	5%	1/6W	
R357	1-247-851-00	CARBON	6.8K	5%	1/6W	
R358	1-247-831-00	CARBON	1K	5%	1/6W	
R359	1-247-835-00	CARBON	1.5K	5%	1/6W	
R360	1-247-831-00	CARBON	1K	5%	1/6W	
R362	1-247-828-00	CARBON	750	5%	1/6W	
R501	1-247-817-00	CARBON	270	5%	1/6W	
R502	1-247-817-00	CARBON	270	5%	1/6W	
R503	1-247-845-00	CARBON	3.9K	5%	1/6W	
R504	1-247-841-00	CARBON	2.7K	5%	1/6W	
R505	1-247-873-00	CARBON	56K	5%	1/6W	
R506	1-214-763-00	METAL	27K	1%	1/4W	
R507	1-202-847-00	SOLID	560K		1/2W	
R509	1-247-769-00	CARBON	2.7	5%	1/6W	
R510	1-214-771-00	METAL	56K	1%	1/4W	
R511	1-247-833-00	CARBON	1.2K	5%	1/6W	
R512	1-247-843-00	CARBON	3.3K	5%	1/6W	
R513	1-247-850-00	CARBON	6.2K	5%	1/6W	
R514	1-206-640-00	METAL OXIDE	100	5%	2W	F
R515	1-247-847-00	CARBON	4.7K	5%	1/6W	
R516	1-214-768-00	METAL	43K	1%	1/4W	

Ref.No.	Part No.	Description				Remark
R517	1-247-829-00	CARBON	820	5%	1/6W	
R518	1-247-783-00	CARBON	10	5%	1/8W	F
R519	1-244-859-00	CARBON	270	5%	1/2W	
R520	1-247-847-00	CARBON	4.7K	5%	1/6W	
R521	1-247-855-00	CARBON	10K	5%	1/6W	
R522	1-247-877-00	CARBON	82K	5%	1/6W	
R523	1-247-843-00	CARBON	3.3K	5%	1/6W	
R524	1-247-868-00	CARBON	36K	5%	1/6W	
R525	1-247-857-00	CARBON	12K	5%	1/6W	
R526	1-247-829-00	CARBON	820	5%	1/6W	
R527	1-247-853-00	CARBON	8.2K	5%	1/6W	
R528	1-247-857-00	CARBON	12K	5%	1/6W	
R529	1-247-877-00	CARBON	82K	5%	1/6W	
R530	1-213-158-00	METAL OXIDE	18K	5%	1W	F
R531	1-246-469-00	CARBON	680	5%	1/4W	
R532	1-212-364-00	METAL OXIDE	2.2	5%	1W	F
R534	1-206-745-00	METAL OXIDE	6.8K	5%	3W	F
R535	⚠1-246-994-00	CARBON	680	5%	1/8W	F
R536	⚠1-247-636-00	CARBON	0.47	5%	1/8W	F
R537	1-202-830-00	SOLID	10K		1/2W	
R538	⚠1-246-979-00	CARBON	1.2	5%	1/8W	F
R539	1-246-528-00	CARBON	200K	5%	1/4W	
R540	1-246-493-00	CARBON	6.8K	5%	1/4W	
R541	1-202-830-51	SOLID	10K		1/2W	
R542	1-247-871-00	CARBON	47K	5%	1/6W	
R543	1-247-847-00	CARBON	4.7K	5%	1/6W	
R544	1-247-809-00	CARBON	120	5%	1/6W	
R545	1-246-535-00	CARBON	390K	5%	1/4W	
R546	1-206-735-61	METAL OXIDE	2.7K	5%	3W	F
R547	1-247-827-00	CARBON	680	5%	1/6W	
R548	1-212-372-00	METAL OXIDE	10	5%	1W	F
R549	1-212-372-00	METAL OXIDE	10	5%	1W	F
R550	1-206-463-00	METAL OXIDE	10	5%	2W	F
R551	1-247-839-00	CARBON	2.2K	5%	1/8W	F
R552	1-247-863-00	CARBON	22K	5%	1/6W	
R553	1-213-139-00	METAL OXIDE	470	5%	1W	F
R554	⚠1-217-371-00	FUSIBLE	0.47	10%	1/4W	F
R555	1-247-845-00	CARBON	3.9K	5%	1/6W	
R556	1-212-372-00	METAL OXIDE	10	5%	1W	F
R557	1-246-988-00	CARBON	56	5%	1/8W	F
R558	1-247-867-00	CARBON	33K	5%	1/6W	
R559	1-213-130-00	METAL OXIDE	82	5%	1W	F
R560	1-247-849-00	CARBON	5.6K	5%	1/6W	
R561	⚠1-247-040-00	CARBON	1K	5%	1/8W	F
R562	1-202-826-00	SOLID	4.7K		1/2W	
R601	1-247-855-00	CARBON	10K	5%	1/6W	
R602	1-202-463-00	SOLID	2.2M	5%	1/4W	
R603	1-247-865-00	CARBON	27K	5%	1/6W	
R604	1-247-855-00	CARBON	10K	5%	1/6W	
R605	1-247-879-00	CARBON	100K	5%	1/6W	
R606	1-247-829-00	CARBON	820	5%	1/6W	

A H1

Ref.No.	Part No.	Description				Remark
R607	1-247-825-00	CARBON	560	5%	1/6W	
R608	1-247-889-00	CARBON	270K	5%	1/6W	
R609	1-247-825-00	CARBON	560K	5%	1/6W	
R610	1-247-873-00	CARBON	56K	5%	1/6W	
R611	1-247-891-00	CARBON	330K	5%	1/6W	
R612	1-247-871-00	CARBON	47K	5%	1/6W	
R613	1-247-871-00	CARBON	47K	5%	1/6W	
R614	1-247-819-00	CARBON	330	5%	1/6W	
R615	1-214-597-00	METAL OXIDE	100K	5%	2W	F
R616	1-247-869-00	CARBON	39K	5%	1/6W	
R617	1-247-885-00	CARBON	180K	5%	1/6W	
R618	1-247-879-00	CARBON	100K	5%	1/6W	
R619	1-247-827-00	CARBON	680	5%	1/6W	
R620	1-213-159-00	METAL OXIDE	22K	5%	1W	F
R621	1-205-687-00	CEMENTED	54K	10%	7W	
R622	1-247-805-00	CARBON	82	5%	1/6W	
R623	**⚠1-217-465-00**	**FUSIBLE**	**0.47**	**5%**	**1W**	**F**
R624	**⚠1-217-465-00**	**FUSIBLE**	**0.47**	**5%**	**1W**	**F**
R625	1-247-831-00	CARBON	1K	5%	1/6W	
R626	1-217-193-00	WIREWOUND	0.27	10%	2W	F
R627	1-246-546-00	CARBON	8.2M	10%	1/2W	
R628	1-247-879-00	CARBON	100K	5%	1/6W	
R629	1-247-855-00	CARBON	10K	5%	1/8W	
R630	1-247-829-00	CARBON	820	5%	1/6W	
R631	1-247-840-00	CARBON	2.4K	5%	1/6W	
R632	1-247-855-00	CARBON	10K	5%	1/6W	
R633	1-247-873-00	CARBON	56K	5%	1/6W	
R634	1-247-871-00	CARBON	47K	5%	1/6W	
R636	1-212-974-00	FUSIBLE	47	5%	1/2W	F

VARIABLE RESISTOR

RV301	1-228-724-00	RES, ADJ, CERAMIC CARBON 10K				
RV302	1-228-723-00	RES, ADJ, CERAMIC CARBON 4.7K				
RV303	1-228-720-00	RES, ADJ, CERAMIC CARBON 1K				
RV304	1-228-723-00	RES, ADJ, CERAMIC CARBON 4.7K				
RV305	1-228-719-00	RES, ADJ, CERAMIC CARBON 470				
RV501	1-228-717-00	RES, ADJ, CERAMIC CARBON 220				
RV502	1-224-250-XX	RES, ADJ, METAL GLAZE 2.2K				
RV503	1-228-160-11	RES, ADJ, METAL GLAZE 5K				
RV504	1-223-102-00	RES, ADJ, WIREWOUND 120				
RV601	1-228-721-00	RES, ADJ, CERAMIC CARBON 2.2K				

SPARK GAP

SG501	1-519-063-XX	DISCHARGING GAP

TRANSFORMER

T251	**⚠1-427-541-11**	**TRANSFORMER, OUTPUT**
T301	1-426-121-00	DAT
T501	1-437-078-00	TRANSFORMER, DRIVE HDT
T502	1-421-268-00	H.PCT
T503	**⚠1-439-294-21**	**TRANSFORMER ASSY, FLYBACK**
T601	**⚠1-421-582-00**	**TRANSFORMER, FERRITE LFT**
T602	1-446-194-00	TRANSFORMER, CHOPPER DRIVE RDT

Ref.No.	Part No.	Description	Remark
T603	1-421-559-00	TRANSFORMER, FERRITE (S.R.T)	

THERMISTOR

TH501	1-806-213-00	THERMISTOR TH-90	
TH601	1-800-945-00	THERMISTOR S-10K	
⚠THP601	**1-806-165-00**	**THERMISTOR (POSITIVE)**	

CRYSTAL

X301	1-527-345-00	CRYSTAL, OSC	

YC MODULE

YCM301	1-235-268-00	MODULE	

****

	♣:1-611-281-11	H1 BOARD ********	

DIODE

D471	8-719-911-19	DIODE 1SS119	
D472	8-719-911-19	DIODE 1SS119	

RESISTOR

R471	1-247-895-00	CARBON	470K	5%	1/6W
R473	1-214-783-00	METAL	180K	1%	1/4W
R474	1-214-769-00	METAL	47K	1%	1/4W
R475	1-247-845-00	CARBON	3.9K	5%	1/6W

VARIABLE RESISTOR

RV471	1-228-539-00	RES, VAR, CARBON 10K
RV472	1-228-583-00	RES, VAR, CARBON 20K

SWITCH

S471	1-553-329-00	SWITCH, PUSH (MONO KEY)
S472	1-553-329-00	SWITCH, PUSH (MONO KEY)
S473	1-553-329-00	SWITCH, PUSH (MONO KEY)
S474	1-553-329-00	SWITCH, PUSH (MONO KEY)
S475	1-553-329-00	SWITCH, PUSH (MONO KEY)
S476	1-553-329-00	SWITCH, PUSH (MONO KEY)
S477	1-553-329-00	SWITCH, PUSH (MONO KEY)
S478	1-553-329-00	SWITCH, PUSH (MONO KEY)
S479	1-553-329-00	SWITCH, PUSH (MONO KEY)
S481	1-553-329-00	SWITCH, PUSH (MONO KEY)
S482	1-553-329-00	SWITCH, PUSH (MONO KEY)
S483	1-553-329-00	SWITCH, PUSH (MONO KEY)
S484	1-553-329-00	SWITCH, PUSH (MONO KEY)
S485	1-553-329-00	SWITCH, PUSH (MONO KEY)
S486	1-553-329-00	SWITCH, PUSH (MONO KEY)

H2 C L S3 S2

Ref.No.	Part No.	Description				Remark
	♣:1-611-282-11	H2 BOARD ********				

SWITCH

S491	1-552-806-21	SWITCH, PUSH				

****

	♣:A-1330-478-A	C BOARD, COMPLETE **********				
	1-526-762-00	SOCKET, CRT				
	♣:4-365-803-00	COVER (MAIN), CV CONTROL				
	♣:4-365-804-00	COVER (REAR LID), CV CONTROL				

CAPACITOR

C702	1-102-978-00	CERAMIC	220PF	5%	50V
C703	1-102-971-00	CERAMIC	82PF	5%	50V
C704	1-102-971-00	CERAMIC	82PF	5%	50V
C705	1-102-249-00	CERAMIC	680PF	20%	2KV
C706	1-129-714-00	FILM	0.01MF	20%	630V
C720	1-102-155-00	CERAMIC	330PF	20%	2KV

COIL

L701	1-407-681-00	MICRO INDUCTOR 1UH
L704	1-408-424-00	MICRO INDUCTOR 180UH

TRANSISTOR

Q701	8-729-322-78	TRANSISTOR 2SC2278
Q702	8-729-322-78	TRANSISTOR 2SC2278
Q703	8-729-322-78	TRANSISTOR 2SC2278

RESISTOR

R701	1-247-852-00	CARBON	7.5K	5%	1/6W	
R703	1-247-817-00	CARBON	270	5%	1/6W	
R704	1-247-844-00	CARBON	3.6K	5%	1/6W	
R705	1-202-824-00	SOLID	3.3K		1/2W	
R706	1-206-690-00	METAL OXIDE	12K	5%	2W	F
R707	1-247-846-00	CARBON	4.3K	5%	1/6W	
R708	1-247-826-00	CARBON	620	5%	1/6W	
R709	1-247-823-00	CARBON	470	5%	1/6W	
R710	1-247-844-00	CARBON	3.6K	5%	1/6W	
R711	1-202-824-00	SOLID	3.3K		1/2W	
R712	1-206-690-00	METAL OXIDE	12K	5%	2W	F
R713	1-247-846-00	CARBON	4.3K	5%	1/6W	
R714	1-247-826-00	CARBON	620	5%	1/6W	
R715	1-247-823-00	CARBON	470	5%	1/6W	
R716	1-247-844-00	CARBON	3.6K	5%	1/6W	
R717	1-202-824-00	SOLID	3.3K		1/2W	
R718	1-206-690-00	METAL OXIDE	12K	5%	2W	F
R719	1-202-842-51	SOLID	220K		1/2W	
R720	1-202-719-00	SOLID	1M	10%	1/2W	
R722	1-202-848-00	SOLID	680K		1/2W	

Ref.No.	Part No.	Description				Remark
R724	1-202-838-00	SOLID	100K		1/2W	
R727	1-247-807-00	CARBON	100	5%	1/6W	
R728	1-247-807-00	CARBON	100	5%	1/6W	
R729	1-247-807-00	CARBON	100	5%	1/6W	
R730	1-202-827-51	SOLID	5.6K		1/2W	

VARIABLE RESISTOR

RV701	1-230-105-00	RES, ADJ, CARBON 3.3K				
RV702	1-230-103-00	RES, ADJ, CARBON 2.2K				
RV703	1-230-104-00	RES, ADJ, CARBON 4.7K				
RV704	1-230-103-00	RES, ADJ, CARBON 2.2K				
RV705	1-230-104-00	RES, ADJ, CARBON 4.7K				
RV706	1-230-164-00	RES, ADJ, METAL GLAZE 55M				
RV707	1-226-114-00	RES, ADJ, METAL GLAZE 2.2M				
RV708	1-226-114-00	RES, ADJ, METAL GLAZE 2.2M				
RV709	1-228-724-00	RES, ADJ, CERAMIC CARBON 10K				

****

	♣:1-611-284-11	L BOARD *******				
	♣:4-368-119-00	HOLDER, LED				

DIODE

LED471	8-719-800-24	DIODE TLR147
LED472	8-719-812-41	DIODE TLR124
LED473	8-719-812-43	DIODE TLG124A

****

	♣:1-611-283-11	S3 BOARD ********				
	♣:1-557-024-00	CABLE (WITH PIN)				
	1-557-194-11	SOCKET,PAL ANTENNA(WITH CABLE)				

CAPACITOR

C901	⚠1-102-395-00	CERAMIC	330PF	20%	1.6KV
C902	⚠1-102-395-00	CERAMIC	330PF	20%	1.6KV
C903	⚠1-102-395-00	CERAMIC	330PF	20%	1.6KV

****

	♣:1-610-433-00	S2 BOARD ********				

DIODE

D481	8-719-924-06	DIODE ERC24-06S

RESISTOR

R481	1-202-824-00	SOLID	3.3K	10%	1/2W

RELAY LINE

RL481	1-515-511-00	RELAY, HIGH FREQUENCY

S1

S1 Z N

Ref.No.	Part No.	Description				Remark
	★:A-1355-079-A	S1 BOARD, COMPLETE				
		**********				
	★:4-365-811-00	CASE (MAIN), SHIELD, VIF				
	★:4-368-165-02	LID, UPPER, VIF SHIELD CASE				
	★:4-368-166-01	LID, BOTTOM, VIF SHIELD CASE				
		CAPACITOR				
C201	1-123-356-00	ELECT	10MF	20%	16V	
C202	1-108-389-00	MYLAR	0.1MF	10%	100V	
C203	1-108-387-00	MYLAR	0.068MF	10%	100V	
C204	1-108-389-00	MYLAR	0.1MF	10%	100V	
C205	1-123-356-00	ELECT	10MF	20%	16V	
C206	1-123-332-00	ELECT	47MF	20%	16V	
C207	1-108-387-00	MYLAR	0.068MF	10%	100V	
C208	1-123-356-00	ELECT	10MF	20%	16V	
C209	1-102-963-00	CERAMIC	33PF	5%	50V	
C210	1-123-356-00	ELECT	10MF	20%	16V	
C211	1-102-125-00	CERAMIC	0.0047MF	10%	50V	
C212	1-102-963-00	CERAMIC	33PF	5%	50V	
C213	1-123-356-00	ELECT	10MF	20%	16V	
C214	1-102-125-00	CERAMIC	0.0047MF	10%	50V	
C215	1-102-125-00	CERAMIC	0.0047MF	10%	50V	
C216	1-102-125-00	CERAMIC	0.0047MF	10%	50V	
C217	1-123-609-00	ELECT	0.33MF	20%	50V	
C218	1-161-051-00	CERAMIC	0.01MF	10%	50V	
C219	1-102-525-00	CERAMIC	68PF	5%	50V	
C220	1-161-021-00	CERAMIC	0.047MF	10%	25V	
C221	1-123-318-00	ELECT	33MF	20%	16V	
C222	1-161-059-00	CERAMIC	0.047MF	10%	50V	
C224	1-123-318-00	ELECT	33MF	20%	16V	
C225	1-102-824-00	CERAMIC	470PF	5%	50V	
C226	1-102-125-00	CERAMIC	0.0047MF	10%	50V	
C227	1-102-125-00	CERAMIC	0.0047MF	10%	50V	
C228	1-102-125-00	CERAMIC	0.0047MF	10%	50V	
C229	1-102-513-00	CERAMIC	18PF	5%	50V	
C230	1-102-525-00	CERAMIC	68PF	5%	50V	
C231	1-121-705-00	ELECT	2.2MF	30%	25V	
C232	1-123-021-00	ELECT	0.47MF	30%	50V	
C233	1-108-242-00	MYLAR	0.022MF	10%	50V	
C234	1-123-380-00	ELECT	1MF	20%	50V	
C235	1-102-523-00	CERAMIC	56PF	5%	50V	
C236	1-102-125-00	CERAMIC	0.0047MF	10%	50V	
C237	1-102-822-00	CERAMIC	390PF	5%	50V	
C238	1-102-525-00	CERAMIC	68PF	5%	50V	
C239	1-102-513-00	CERAMIC	18PF	5%	50V	
C242	1-123-317-00	ELECT	22MF	20%	16V	
		FILTER				
CF201	1-404-134-00	TRAP, CERAMIC (5.5MHZ)				
CF202	1-527-263-00	CERAMIC FILTER (5.5MHZ)				
CF203	1-404-473-00	DISCRIMINATOR, CERAMIC				

Ref.No.	Part No.	Description				Remark
		DIODE				
D201	⚠8-719-911-19	DIODE 1SS119				
D202	8-719-101-51	DIODE RD5.1E-L3				
		IC				
IC201	8-759-800-12	IC LA7920				
IC202	8-752-001-51	IC CX20015A				
		COIL				
L201	1-407-488-00	MICRO INDUCTOR 470UH				
L202	1-408-397-00	MICRO INDUCTOR 1UH				
L203	1-408-408-00	MICRO INDUCTOR 8.2UH				
L204	1-408-410-00	MICRO INDUCTOR 12UH				
L205	1-408-400-00	MICRO INDUCTOR 1.8UH				
L206	1-408-413-00	MICRO INDUCTOR 22UH				
L207	1-404-465-00	COIL, VIF (MOLD TYPE)				
L208	1-404-465-00	COIL, VIF (MOLD TYPE)				
L209	1-408-424-00	MICRO INDUCTOR 180UH				
		TRANSISTOR				
Q201	8-729-245-83	TRANSISTOR 2SC2458				
Q202	8-765-300-00	TRANSISTOR 2SC2009				
Q203	8-729-204-83	TRANSISTOR 2SA1048-GR				
Q204	8-729-245-83	TRANSISTOR 2SC2458				
		RESISTOR				
R201	1-247-839-00	CARBON	2.2K	5%	1/6W	
R202	⚠1-246-530-00	CARBON	240K	5%	1/4W	
R203	1-247-879-00	CARBON	100K	5%	1/6W	
R204	1-247-879-00	CARBON	100K	5%	1/6W	
R205	1-247-847-00	CARBON	4.7K	5%	1/6W	
R206	1-247-847-00	CARBON	4.7K	5%	1/6W	
R207	1-247-839-00	CARBON	2.2K	5%	1/6W	
R208	1-247-863-00	CARBON	22K	5%	1/6W	
R209	1-247-855-00	CARBON	10K	5%	1/6W	
R210	1-247-891-00	CARBON	330K	5%	1/6W	
R211	1-247-839-00	CARBON	2.2K	5%	1/6W	
R212	1-247-839-00	CARBON	2.2K	5%	1/6W	
R213	1-247-803-00	CARBON	68	5%	1/6W	
R214	1-247-833-00	CARBON	1.2K	5%	1/6W	
R215	1-247-845-00	CARBON	3.9K	5%	1/6W	
R216	1-247-813-00	CARBON	180	5%	1/6W	
R217	1-247-818-00	CARBON	300	5%	1/6W	
R218	1-247-807-00	CARBON	100	5%	1/6W	
R219	1-247-825-00	CARBON	560	5%	1/6W	
R220	1-247-822-00	CARBON	430	5%	1/6W	
R221	1-247-826-00	CARBON	620	5%	1/6W	
R222	1-247-843-00	CARBON	3.3K		1/6W	
R223	1-247-847-00	CARBON	4.7K	5%	1/6W	
R224	1-247-883-00	CARBON	150K	5%	1/6W	
R225	1-247-805-00	CARBON	82	5%	1/6W	
R226	1-247-841-00	CARBON	2.7K	5%	1/6W	
R227	1-247-831-00	CARBON	1K	5%	1/6W	

Ref.No.	Part No.	Description				Remark
R228	1-247-871-00	CARBON	47K	5%	1/6W	
R229	1-247-857-00	CARBON	12K	5%	1/6W	
R230	1-247-857-00	CARBON	12K	5%	1/6W	
R232	1-247-863-00	CARBON	22K	5%	1/6W	
R233	1-247-839-00	CARBON	2.2K	5%	1/6W	
R234	1-247-828-00	CARBON	750	5%	1/6W	
R235	1-247-831-00	CARBON	1K	5%	1/6W	
R236	1-247-829-00	CARBON	820	5%	1/6W	
R237	1-247-783-00	CARBON	10	5%	1/8W	F
R238	1-214-714-51	METAL	240	1%	1/4W	
R239	1-214-134-00	METAL	1.2K	1%	1/4W	
		VARIABLE RESISTOR				
RV201	1-228-723-00	RES, ADJ, CERAMIC CARBON 4.7K				
		CONNECTOR				
S1	★:1-560-127-00	PLUG, CONNECTOR (2.5MM) 7P				
S2	★:1-560-128-00	PLUG, CONNECTOR (2.5MM PITCH) 8P				
		FILTER				
SF201	⚠1-404-433-00	SAWF				
	★:4-336-029-00	PLATE, SHIELD; SF201				
		TRASNFORMER				
T201	1-404-465-00	COIL, VIF (MOLD TYPE)				
T204	1-404-465-00	COIL, VIF (MOLD TYPE)				
		TUNER				
TU201	⚠1-463-421-21	TUNER, ET (BT-883)				
		**********				
	★:1-611-285-11	Z BOARD				
		*******				
		JACK				
EJ901	1-507-864-00	JACK, EARPHONE				
		**********				
	★:1-606-794-00	N BOARD				
		*******				
	★:1-556-332-00	CONNECTOR ASSY (2.5MM) 3P				
	★:4-342-117-00	CASE, SHIELD (MAIN), R				
	★:4-342-118-00	LID, SHIELD CASE, R				
		CAPACITOR				
C1	1-123-617-00	ELECT	10MF	20%	16V	
C2	1-123-617-00	ELECT	10MF	20%	16V	
C3	1-123-617-00	ELECT	10MF	20%	16V	
C4	1-161-019-00	CERAMIC	0.033MF	10%	25V	
C5	1-108-567-00	MYLAR	0.0033MF	5%	50V	

Ref.No.	Part No.	Description				Remark
C6	1-123-821-00	ELECT	47MF	20%	16V	
		DIODE				
D1	8-719-110-32	DIODE PH302B				
		IC				
IC1	8-759-113-73	IC UPC1373H				
		COIL				
L1	1-404-310-00	COIL 4.7mH				
		**********				
		MISCELLANEOUS				
		**********				
	1-452-277-00	MAGNET, BMC				
	⚠1-451-230-00	DEFLECTION YOKE (SY-125)				
	1-452-032-00	MAGNET, DISK; 10MM				
	1-452-094-00	MAGNET, ROTATABLE DISK; 15MM				
	1-501-152-00	ROD ANTENNA, TYPE B				
	★:1-507-900-00	JACK				
	⚠1-536-683-00	CONNECTOR, COAXIAL ANTENNA				
	⚠1-551-908-31	CORD, POWER, EULO PLUG				
	★:1-556-565-21	CABLE (PAL.PIN)				
	★:1-557-024-00	CABLE (WITH PIN)				
	★:1-557-056-00	CABLE, P-P				
	1-557-194-11	SOCKET, PAL ANTENNA (WITH CABLE)				
C905	1-161-491-00	CAP, CERAMIC 470PF				
L901	⚠1-426-145-00	COIL, DEGAUSSING				
L902	⚠1-426-145-00	COIL, DEGAUSSING				
S901	⚠1-553-225-00	SWITCH, PUSH				
SP901	1-503-239-00	SPEAKER				
V901	⚠8-735-550-05	CRT (A34JBU00X)				
		**********				
		ACCESSORIES AND PACKING MATERIALS				
		**********				
Part No.	Description					Remark
A-1470-625-A	COMMANDER ASSY (RM-635)					
1-504-034-72	MAGNETIC EARPHONE ME-20					
3-701-631-00	BAG, POLYETHYLENE					
4-314-534-00	BAG, POLYETHYLENE					
4-368-140-00	CUSHION (UPPER) (ASSY)					
4-368-141-00	CUSHION (LOWER) (ASSY)					
4-368-147-00	INDIVIDUAL CARTON					
4-493-831-11	MANUAL, INSTRUCTION					

S1 (KV1412ET only)

Ref.No.	Part No.	Description				Remark
	*A-1355-085-A	S1 BOARD, SUB, COMPLETE **********				
	*4-365-811-00	CASE (MAIN), SHIELD, VIF				
	*4-368-165-01	LID, UPPER, VIF SHIELD CASE				
	*4-368-166-01	LID, BOTTOM, VIF SHIELD CASE				
		CAPACITOR				
C201	1-123-356-00	ELECT	10MF	20%	16V	
C202	1-123-356-00	ELECT	10MF	20%	16V	
C203	1-106-216-00	MYLAR	0.068MF	10%	100V	
C205	1-123-356-00	ELECT	10MF	20%	16V	
C206	1-123-332-00	ELECT	47MF	20%	16V	
C207	1-106-216-00	MYLAR	0.068MF	10%	100V	
C208	1-123-356-00	ELECT	10MF	20%	16V	
C209	1-102-963-00	CERAMIC	33PF	5%	50V	
C210	1-123-356-00	ELECT	10MF	20%	16V	
C211	1-102-125-00	CERAMIC	0.0047MF	10%	50V	
C212	1-102-518-00	CERAMIC	33PF	5%	50V	
C213	1-123-356-00	ELECT	10MF	20%	16V	
C214	1-102-125-00	CERAMIC	0.0047MF	10%	50V	
C215	1-102-125-00	CERAMIC	0.0047MF	10%	50V	
C216	1-102-125-00	CERAMIC	0.0047MF	10%	50V	
C217	1-123-379-00	ELECT	0.47MF	20%	50V	
C218	1-161-051-00	CERAMIC	0.01MF	10%	50V	
C219	1-102-524-00	CERAMIC	62PF	5%	50V	
C220	1-161-059-00	CERAMIC	0.047MF	10%	25V	
C221	1-123-318-00	ELECT	33MF	20%	16V	
C222	1-161-059-00	CERAMIC	0.047MF	10%	50V	
C224	1-123-318-00	ELECT	33MF	20%	16V	
C225	1-102-824-00	CERAMIC	470PF	5%	50V	
C226	1-102-125-00	CERAMIC	0.0047MF	10%	50V	
C227	1-102-125-00	CERAMIC	0.0047MF	10%	50V	
C228	1-102-125-00	CERAMIC	0.0047MF	10%	50V	
C229	1-102-513-00	CERAMIC	18PF	5%	50V	
C230	1-102-525-00	CERAMIC	68PF	5%	50V	
C231	1-121-705-00	ELECT	2.2MF	30%	25V	
C232	1-123-021-00	ELECT	0.47MF	30%	50V	
C233	1-108-587-00	MYLAR	0.022MF	10%	50V	
C234	1-123-380-00	ELECT	1MF	20%	50V	
C235	1-102-523-00	CERAMIC	56PF	5%	50V	
C236	1-102-125-00	CERAMIC	0.0047MF	10%	50V	
C242	1-123-330-00	ELECT	22MF	20%	16V	
		FILTER				
CF201	1-404-134-00	TRAP, CERAMIC (5.5MHZ)				
CF202	1-527-263-00	CERAMIC FILTER (5.5MHZ)				
CF203	1-404-473-00	DISCRIMINATOR, CERAMIC				
		DIODE				
D202	8-719-101-51	DIODE RD5.1E-L3				

Ref.No.	Part No.	Description				Remark
		IC				
IC201	8-759-602-16	IC M54572L				
IC202	8-752-001-51	IC CX20015A				
		COIL				
L201	1-407-488-00	MICRO INDUCTOR 470UH				
L202	1-408-397-00	MICRO INDUCTOR 1UH				
L203	1-408-408-00	MICRO INDUCTOR 8.2UH				
L204	1-408-410-00	MICRO INDUCTOR 12UH				
L205	1-408-400-00	MICRO INDUCTOR 1.8UH				
L206	1-408-413-00	MICRO INDUCTOR 22UH				
L208	1-404-465-00	COIL, VIF (MOLD TYPE)				
L209	1-408-424-00	MICRO INDUCTOR 180UH				
L222	1-407-184-XX	MICRO INDUCTOR 3.3UH				
		TRANSISTOR				
Q201	8-729-245-83	TRANSISTOR 2SC2458				
Q202	8-765-300-00	TRANSISTOR 2SC2009				
Q203	8-729-204-83	TRANSISTOR 2SA1048GR				
Q204	8-729-245-83	TRANSISTOR 2SC2458				
		RESISTOR				
R201	1-247-839-00	CARBON	2.2K	5%	1/6W	
R202	1-247-847-00	CARBON	4.7K	5%	1/6W	
R203	1-247-783-00	CARBON	10	5%	1/6W	
R205	1-247-847-00	CARBON	4.7K	5%	1/6W	
R206	1-247-847-00	CARBON	4.7K	5%	1/6W	
R207	1-247-863-00	CARBON	22K	5%	1/6W	
R210	1-247-891-00	CARBON	330K	5%	1/6W	
R211	1-247-839-00	CARBON	2.2K	5%	1/6W	
R212	1-247-839-00	CARBON	2.2K	5%	1/6W	
R213	1-247-789-00	CARBON	18	5%	1/6W	
R214	1-247-839-00	CARBON	2.2K	5%	1/6W	
R216	1-247-813-00	CARBON	180	5%	1/6W	
R217	1-247-818-00	CARBON	300	5%	1/6W	
R218	1-247-807-00	CARBON	100	5%	1/6W	
R219	1-247-825-00	CARBON	560	5%	1/6W	
R220	1-247-829-00	CARBON	820	5%	1/6W	
R221	1-247-826-00	CARBON	620	5%	1/6W	
R222	1-247-843-00	CARBON	3.3K	5%	1/6W	
R223	1-247-847-00	CARBON	4.7K	5%	1/6W	
R224	1-247-879-00	CARBON	100K	5%	1/6W	
R225	1-247-815-00	CARBON	220	5%	1/6W	
R227	1-247-831-00	CARBON	1K	5%	1/6W	
R228	1-247-865-00	CARBON	27K	5%	1/6W	
R229	1-247-857-00	CARBON	12K	5%	1/6W	
R230	1-247-857-00	CARBON	12K	5%	1/6W	
R231	1-247-874-00	CARBON	62K	5%	1/6W	
R233	1-247-839-00	CARBON	2.2K	5%	1/6W	
R234	1-247-828-00	CARBON	750	5%	1/6W	
R235	1-247-831-00	CARBON	1K	5%	1/6W	
R236	1-247-829-00	CARBON	820	5%	1/6W	

S1

Ref.No.	Part No.	Description				Remark
R237	1-247-783-00	CARBON	10	5%	1/8W	F
R238	1-214-710-00	METAL	160	1%	1/4W	
R239	1-214-134-00	METAL	1.2K	1%	1/4W	
R243	1-247-825-00	CARBON	560	5%	1/6W	
		VARIABLE RESISTOR				
RV201	1-228-723-00	RES, ADJ, CERAMIC CARBON 4.7K				
		CONNECTOR				
S1	*1-560-127-00	PLUG, CONNECTOR (2.5MM) 7P				
S2	*1-560-128-00	PLUG, CONNECTOR (2.5MM PITCH)				
		FILTER				
SF201	⚠1-404-433-11	SAWF				
	*4-336-029-00	PLATE, SHIELD; SF201				
		TRANSFORMER				
T201	1-404-465-00	COIL, VIF (MOLD TYPE)				
T204	1-404-465-00	COIL, VIF (MOLD TYPE)				
		TUNER				
TU201	⚠1-463-411-00	TUNER, UHF/VHF ET (UV411)				